



RoHS

IP66-68

6~12 PINS

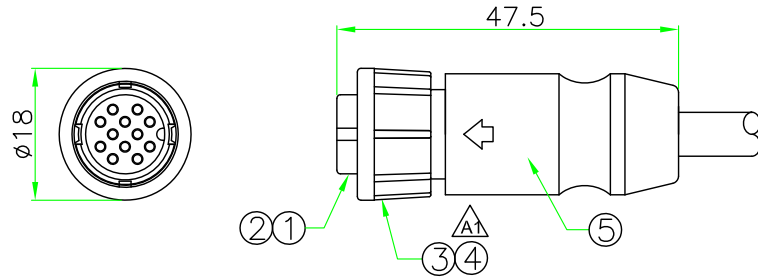

2~5 PINS

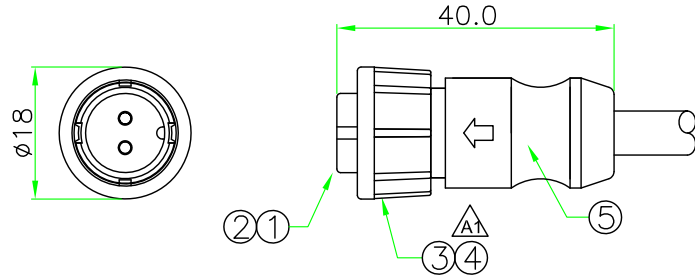

| REV. | DESCRIPTION | DATE |
|------|--------------|-------------|
| A | ISSUE | Feb/12/2005 |
| A1 | Change@Shape | Jun/25/2014 |


NOTES:

1. ELECTRICAL CHARACTERISTICS:

CURRENT RATING: 2A / 5A / 10A
 CONNECTOR TEMPERATURE RANGE: -40°C TO +105°C
 DIELECTRIC WITHSTANDING VOLTAGE:
 500V AC FOR ONE MINUTE

2. HOW TO ORDER: CBx-L2xxSN

02 - 2 PIN 07 - 7 PIN
 03 - 3 PIN 08 - 8 PIN
 04 - 4 PIN 10 - 10 PIN
 05 - 5 PIN 12 - 12 PIN
 06 - 6 PIN
 P - CURRENT RATING 10A
 D - CURRENT RATING 5A
 N - CURRENT RATING 2A

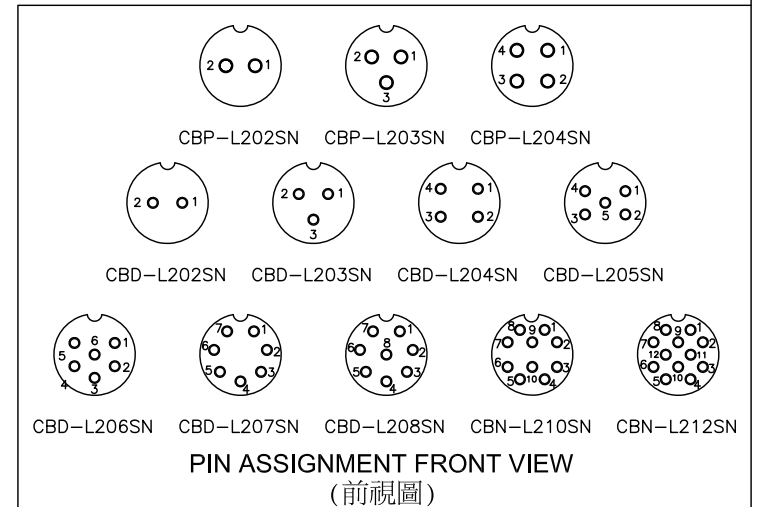

※Cable specification and length can be customized.

| 5 | OVERMOLD | PVC or PU. | BLACK | 1 | |
|-----|-----------|---|-------|------|---------|
| 4 | LOCK NUT | NYLON+GF | BLACK | 1 | |
| 3 | O-RING | NBR. | BLACK | 1 | |
| 2 | CONTACT | Brass ,Female Pin. 6u" Gold Plated. | | N | |
| 1 | CONNECTOR | B Size Female Connector Insert, NYLON+GF. | BLACK | 1 | |
| No. | PART NAME | DESCRIPTION | COLOR | Q'TY | REMARKS |

HOLIN® HTP ASIA TECHNOLOGY CO., LTD.
 禾凌科技股份有限公司

| | | |
|--|-----------|--|
| UNIT: mm | TITLE : | Circular B Size Lock Type Female Connector Female Pin Molded Cable |
| SCALE | 1:1 | |
| UNLESS OTHERWISE SPECIFIED TOLERANCES: x ±0.25 xx ±0.1 xxx ±0.05 ANGLE ±.1gX | P/N: | CBx-L2xxSN |
| REV. A1 | SHEET 1/1 | DWG.NO: CBx-L2xxSN |
| | | DR. Patty CH. ERIC AP. |