
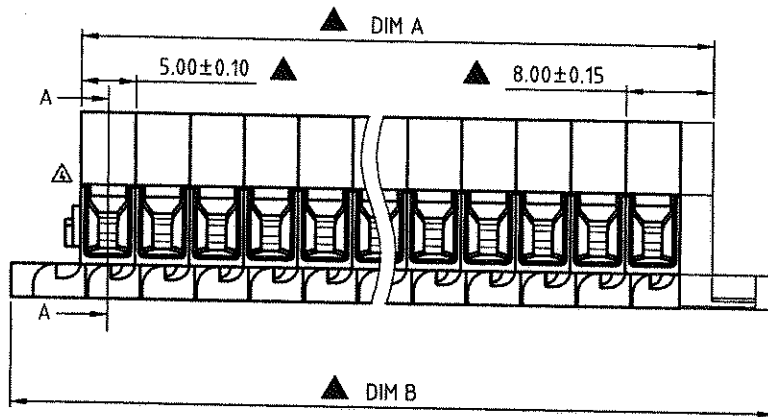
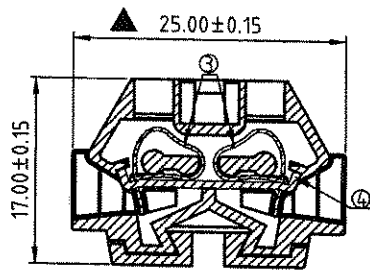


RoHS Compliant

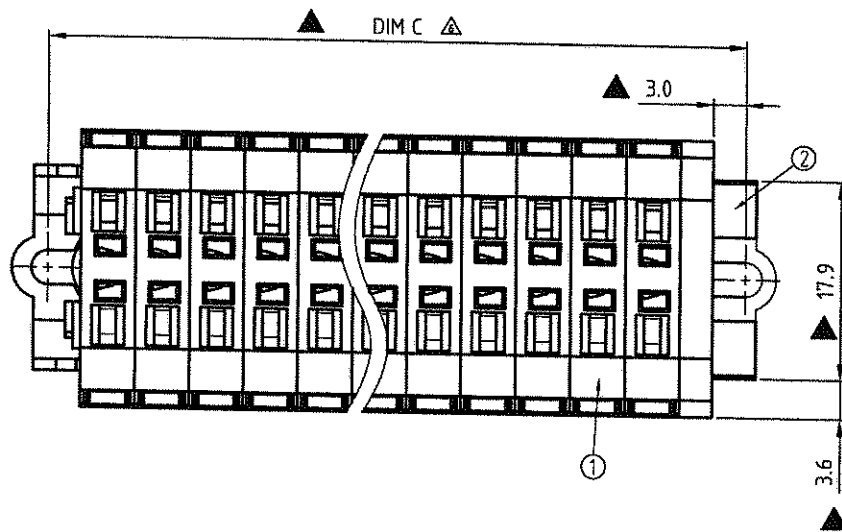

REV	SIGN	DATE	DESCRIPTION	APPROVER
B	▲	03/18 '11	Structure is changed	Runner
C	▲	07/02 '12	Rated current is changed from 15A to 10A	Runner
	▲	07/02 '12	Add "cULus" Safety Approval logo	Runner
D	▲	07/17 '18	Update the cutaway view	Terry
	▲	07/17 '18	Modify the drawing frame	Terry
	▲	07/17 '18	DIM C:Nx5.0+7.9 change to DIM C:Nx5.0+9	Terry
	▲	07/17 '18	Modify the material description	Terry
▲	07/17 '18	Modify the Critical dimension	Terry	

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!

▲ Material

- Item ① Insulating body NL66 (UL94V-0)
- Item ② Insulating cover(right) NL66 (UL94V-0)
- Item ③ Wire guard Stainless Steel
- Item ④ Contacts PIN Brass Bright Tin plated

Electrical

- | | | |
|-------------------------|----------|------------------------|
| | cULus | IEC |
| ● Rated voltage: | 300V | 400V |
| ▲ ● Rated current: | 10A | 18A |
| ● Wire range: | | |
| ● Solid wire: | 28-16AWG | 0.8-1.5mm ² |
| ● Stranded wire: | 28-16AWG | 0.8-1.5mm ² |
| ● Wire strip length: | 8-9mm | |
| ● withstanding voltage: | 1.6kv | 6kv |

- ▲ ● Safety Approval:
- ▲ ● Critical dimension: ▲

Part No:

DS 240 xx 0 x xxx G

- 01 1 pole
 - 02 2 poles
 - 03 3 poles
 -
 - 24 24 poles
- Color
- 0 Black
 - 5 Gree(RAL6018/T)
 - 6 Blue
 - 8 Grey(RAL7004/P)
- RoHS compliant (lead<4%)
In copper Alloy
- 000:"@Logo (Standard)
00A:"ANYTEK"Logo
Any special item by customer request, please contact sales department.



Dimension

DIM A	Nx5.0+3.0
DIM B	Nx5.0+15.1
DIM C	Nx5.0+9

N=Number of poles

Poles	Tolerance
1P-5P	±0.20
6P-10P	±0.30
11P-15P	±0.40
16P-20P	±0.50
21P-24P	±0.60

Amphenol
ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATSOEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE	DS 240 Series with Fixing Flanges type			
PART NO.	DS240xx0xxxxG	DWG NO.	8DS240-0001	
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.
		Terry	Terry	
		2018.07.17	2018.07.17	
SHEET: 01/01		UNIT: mm	Tolerance	
		SCALE: NONE	X. ±0.5	
		REV.: D	X.X ±0.3	
			X.XX ±0.1	
			X° ±1°	