

SIGN	DATE	DESCRIPTION	APPROVER
Δ	12/08-15	Change the dimension from 32 to 21.9	Evan

*THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!*

**KT XX 0 1 X 3 XXXX G**

No. OF POLES  
 03: 3 POLES  
 04: 4 POLES



RoHS compliant  
 (lead<4%)  
 In copper Alloy





0000: "@" Logo (Standard)  
 000A: "ANYTEK" Mark

COLOR

0 Black (RAL9005)	Any special item by
2 Red (RAL3001/D)	customer request.
3 Orange(RAL2011/P)	please contact sales
4 Yellow(RAL1018/A)	department.
5 Green(RAL6018/T)	
6 Blue (RAL5015/A)	
8 Grey(RAL7035/D)	
9 White(RAL1102)	
C Green(RAL6018/U)	

- Material**
- Item ⑤ Terminal(housing) : PA66 (UL94V-0)
  - Item ⑥ Terminal(cover) : PA66 (UL94V-0) (ET 7.62)
  - Item ⑦ Terminal screw : Steel Zinc plating " - " slot type (ET 7.62)
  - Item ⑧ Clamp : Brass, Ni plated (ET 7.62)
  - Item ⑨ Female contact : Copper, Bright Tin plated over Nickel plated
  - Item ⑩ With flange Nut : Steel Zinc plating M3 (VC 7.62)
  - Item ⑪ Steel: Steel t=1.50mm zinc plated.

- Electrical**
- Voltage rating: 600VAC
  - Current rating: 41A
  - Solid wire (AWG): 8-24
  - Stranded wire(AWG): 8-24
  - Torque: 9.0 Lb-in
  - Screw: M3.5
  - Wire strip length: 10-11mm
  - Withstanding Voltage: 1.6kV
  - Operating temperature: -40°C to +115°C
  - Safety Approval: 
  - Critical dimension: 

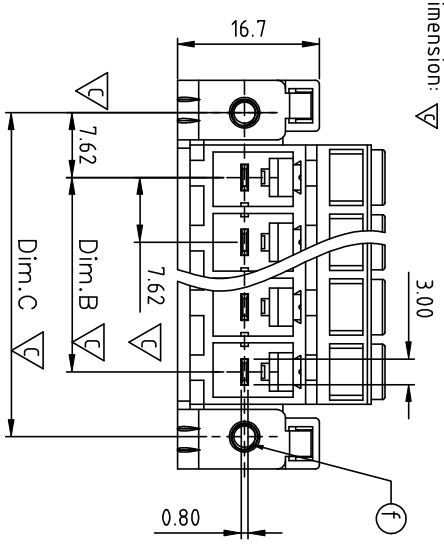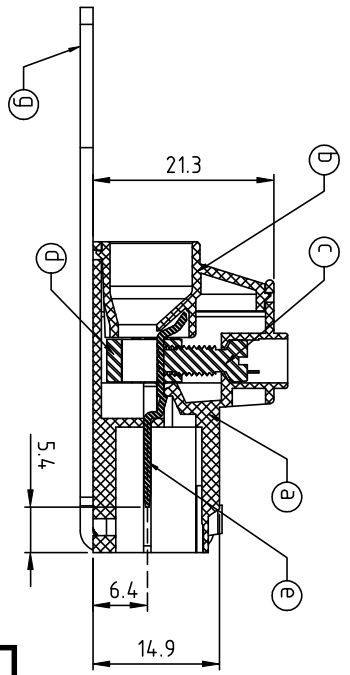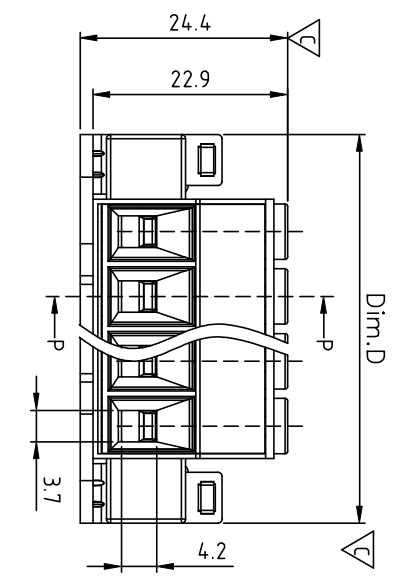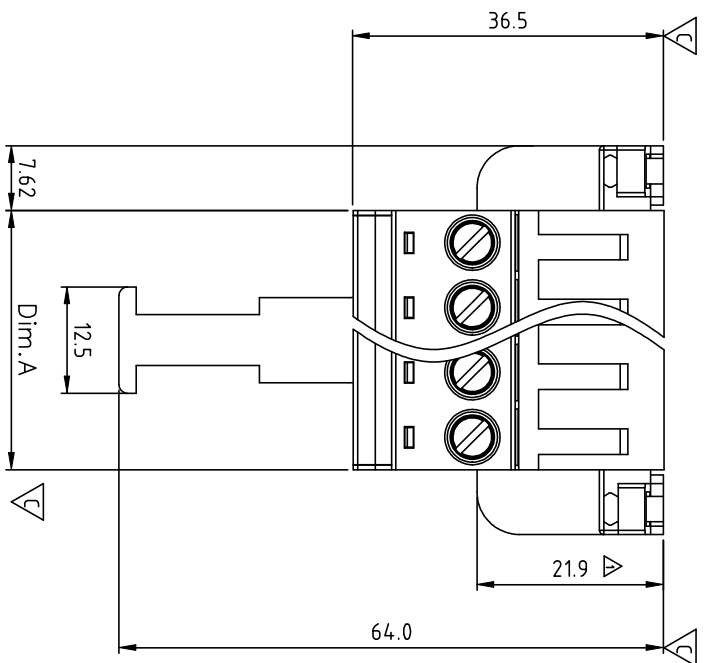

N = Number of poles

Dim.A	N x 7.62
Dim.B	(N-1) x 7.62
Dim.C	(N+1) x 7.62
Dim.D	(N+2) x 7.62

Poles	Tolerance
3P	±0.20
4P	

# ANYTEK

## CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATSOEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD.

TITLE		KT 7.62 Series Flange With Nut ( With handle ) Only 3P & 4P		DWG NO.		8KT0017		Tolerance	
PART NO.	KTxx01x3xxxxG	CHECKED	DESIGNED	DRAWN	CUST NO.			X	±0.50
APPROVED		Evan	Aaron			UNIT:	mm	X X	±0.30
		12/08-15	2011.10.18			SCALE:	NONE	X X X	±0.10
						SHEET:	01/01	REV: C	±1°