
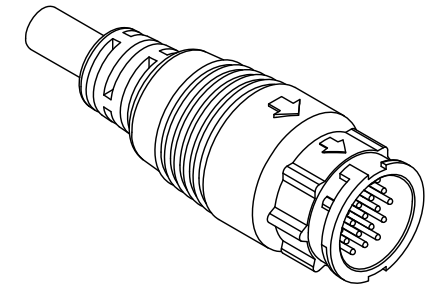


RoHS
IP66~68

REV.	DESCRIPTION	DATE
A	ISSUE	May/25/2015

Ref.

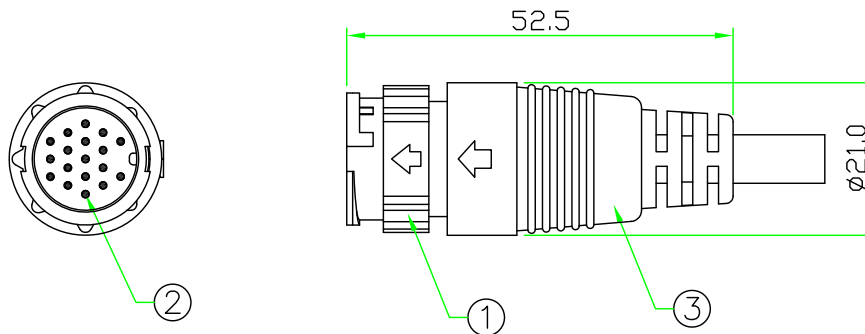

NOTES:

1. ELECTRICAL CHARACTERISTICS:

CURRENT RATING: 2A / 5A / 10A / 20A

CONNECTOR TEMPERATURE RANGE: -20°C TO +80°C


DIELECTRIC WITHSTANDING VOLTAGE:

500V AC FOR ONE MINUTE

2. HOW TO ORDER: CCx-L1xxSM

02 - 2 PIN 09 - 9 PIN
03 - 3 PIN 10 - 10 PIN
04 - 4 PIN 12 - 12 PIN
05 - 5 PIN 14 - 14 PIN
06 - 6 PIN 18 - 18 PIN

G - CURRENT RATING 20A
P - CURRENT RATING 10A
D - CURRENT RATING 5A
N - CURRENT RATING 2A

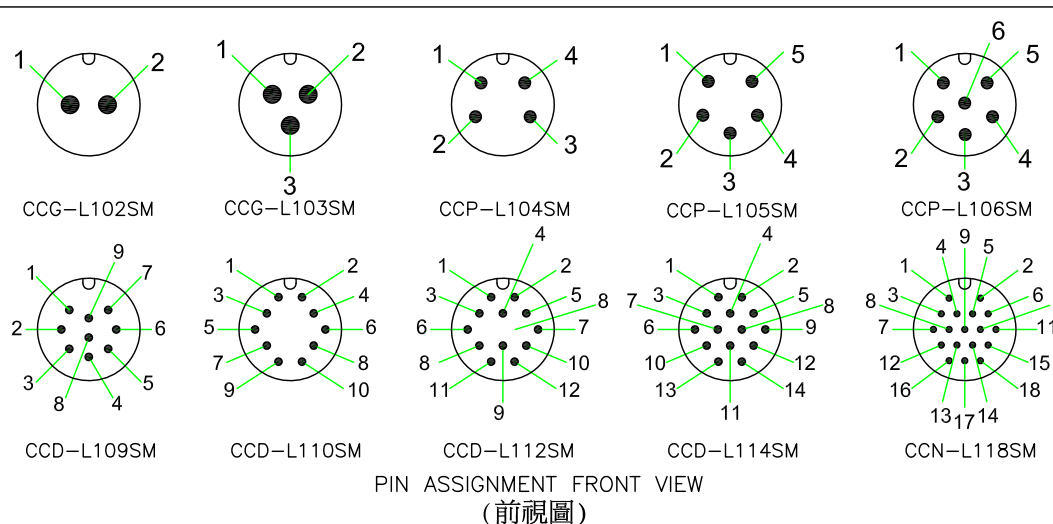

PIN ASSIGNMENT FRONT VIEW
(前視圖)

3	OVERMOLD	PVC or PU.	BLACK	1	
2	CONTACT	Brass , 6 u" Gold Plated .Male Contact.		N	
1	CONNECTOR	C Size Male Connector Insert.NYLON+GF.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

HOLIN® HTP ASIA TECHNOLOGY CO., LTD. 禾凌科技股份有限公司					
		UNIT: mm	TITLE : Circular C Size Lock Type Male Connector Male Pin Molded Cable		
SCALE		1:1			
UNLESS OTHERWISE SPECIFIED TOLERANCES:		P/N: CCx-L1xxSM		DR.	Patty
.X ± 0.5 .XX ± 0.25				CH.	ERIC
.XXX ± 0.1 ANGLE ± 1°					
REV.	A	SHEET	1/1	DWG.NO:	CCx-L1xxSM