

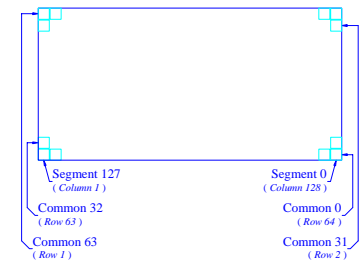

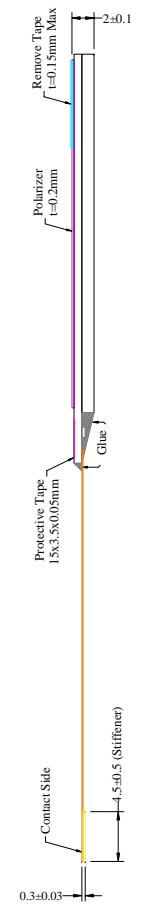


Item	Date	Remark
A	20120417	Original Drawing

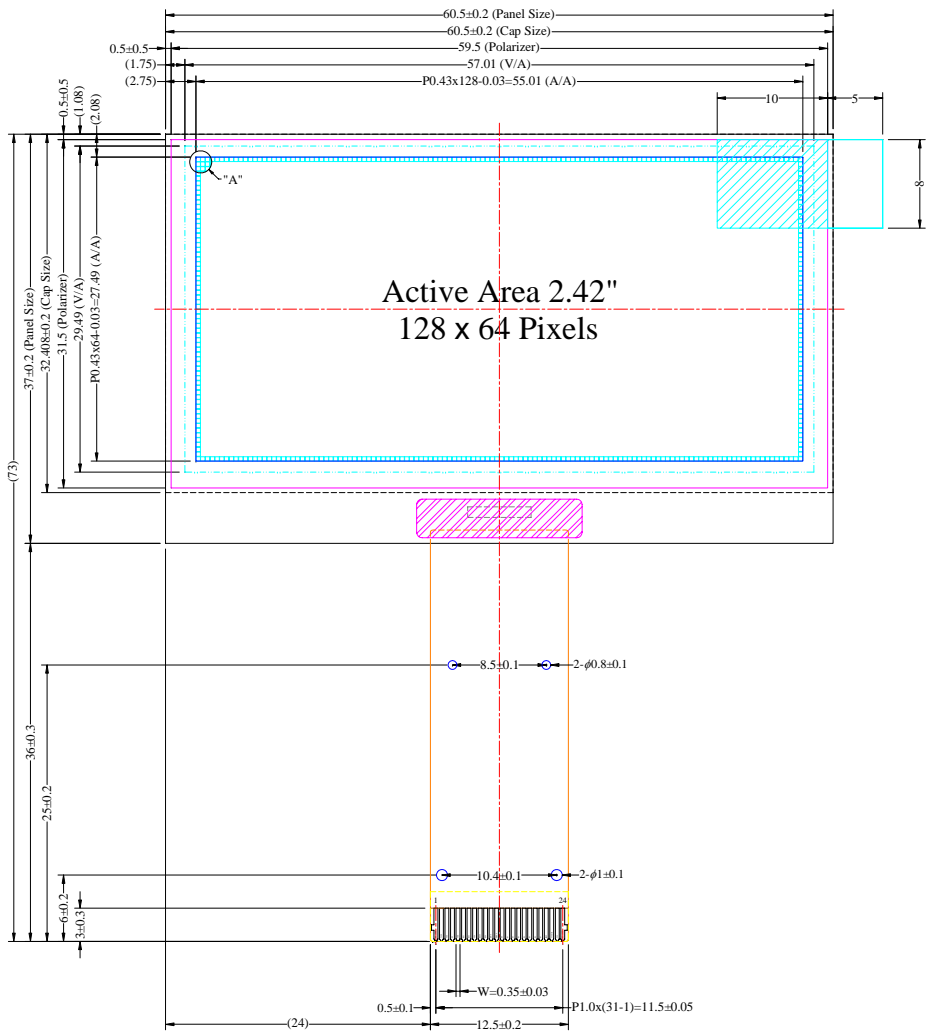

Pin	Symbol
1	N.C. (GND)
2	V _{SS}
3	V _{SS}
4	N.C.
5	V _{DD}
6	BS1
7	BS2
8	CS#
9	RES#
10	D/C#
11	R/W#
12	E/RD#
13	D0
14	D1
15	D2
16	D3
17	D4
18	D5
19	D6
20	D7
21	IR#
22	V _{COAH}
23	V _{CC}
24	N.C. (GND)

- Notes:
- Color: Light Blue
 - Driver IC: SSD1309
 - FPC Number: UT-0205-P05
 - Interface:
8-bit 68XX/80XX Parallel, 4-wire SPI, I2C
 - General Tolerance: ±0.30
 - The total thickness (2.10 Max) is without polarizer protective film & remove tape.
The actual assembled total thickness with above materials should be 2.35 Max.

Customer Approval Signature	WiseChip Semiconductor Inc.							Drawing Number	Rev.		
	<div style="border: 1px solid black; width: 100px; height: 100px; display: flex; align-items: center; justify-content: center;"> </div>	Unless Otherwise Specified		Title	UG-2864ALBPG01 Folding Type OEL Display Module Pixel Number: 128 x 64, Monochrome, COG Package				DMX2864CNGFBB		A
Unit		mm	Material								
General Roughness			By	Date	Soda Lime / Polyimide				Scale	Sheet	Size
Tolerance					Drawn	E.E.	Panel / E.	P.M.			
Dimension	±0.3	Dora Yang	Ting-Kuo Hu	Ivy Lo	Tiffany Hsu	1:1	1 of 1	A3			
Angle	±1	20120417	20120417	20120417	20120417						