


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LL 07/23/06'		


Male

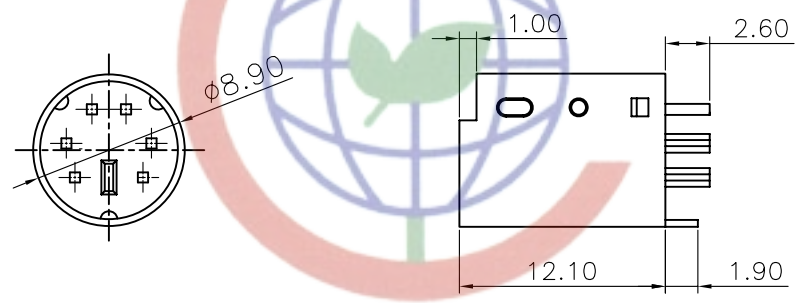

NOTES:



- SPECIFICATIONS:
  - VOLTAGE RATING: 30V DC.
  - CONTACT CURRENT RATING: 1A MAX. PER PIN.
  - CONTACT RESISTANCE: 30 mΩ MAX.
  - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(rms) FOR 1 MINUTE.
  - INSULATION RESISTANCE: 1000 MΩ MIN.
  - OPERATING TEMPERATURE: -40°C~+105°C.
- PRODUCT NUMBER CODE:

DS1062 - X X X X X

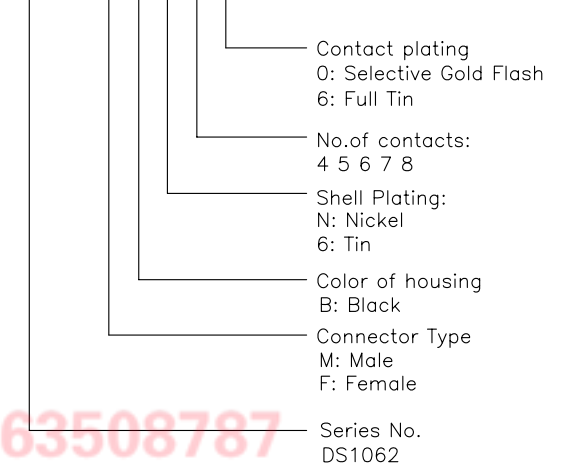

# CONNFLY

Female

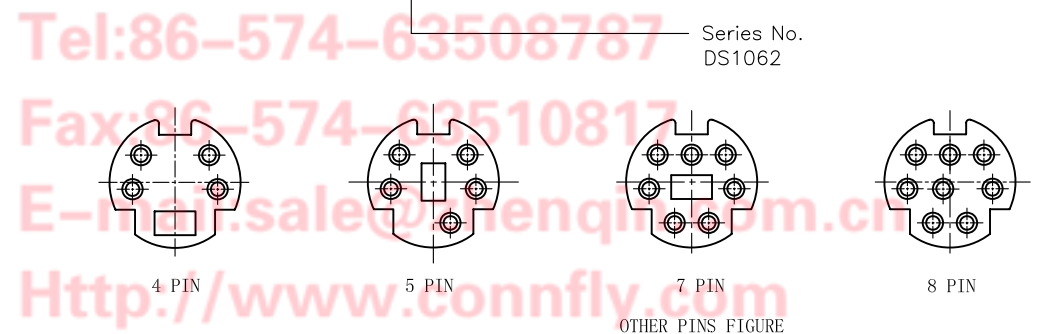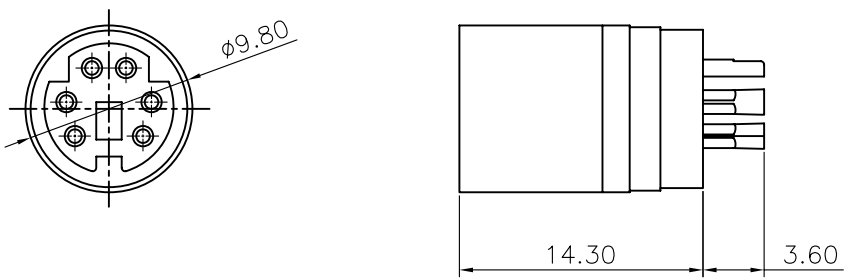

Tel:86-574-63508787  
 Fax:86-574-63510817  
 E-mail:sales@connfly.com.cn  
 Http://www.connfly.com

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE
X.	±0.60	X.	±5°	UNITS	mm	MINI DIN TYPE
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES DS1062 SERIES
.XX	±0.25	.XX	±2°			
DRAWING TYPE	CUSTOMER			晨翔电子有限公司 <b>CONNFLY CONNFLY ELECTRONIC CO. LTD</b>		
SCALE	1:1	SHEET	1 OF 1			
DRAWING NO.	C-DS1062-XXXXX					