





The information provided herein is from CONNFLY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNFLY or its affiliates. Unauthorized use of the information herein, including but not limited to, reproduction, distribution, or disclosure to any third party, is strictly prohibited. CONNFLY may enforce its intellectual property rights at its own discretion, failures or delays to exercise such rights does not constitute a waiver of such rights.

| REV. | DESCRIPTION | DRAWN | CHECKED | APPROVED |
|------|----------------|---------------|---------|---------------|
| A | NEW RELEASE | YCH 03/24/09' | | LJC 03/24/09' |
| B | DRAWING UPDATE | JLZ 05/10/19' | | |
| | | | | |


- Notes:
- Specifications:
- Contact Resistance: 100mΩ Max.
 - Insulation Resistance: 1000MΩ Min.
 - Dielectric Withstanding Voltage: 500V AC(rms) For 1 Minute.
 - Current Rating: 25mA.
 - Voltage Rating: 24V DC rms.
 - Temperature: -25°C~+70°C.
 - Operating Life: 2000 cycle min.
- Materials:
- Contact Material: Copper Alloy.
 - Contact Plating: Gold Plating Over Nickel.
 - Insulator Material: High temperature 260°C, UL 94V-0.
- Product Number Code:

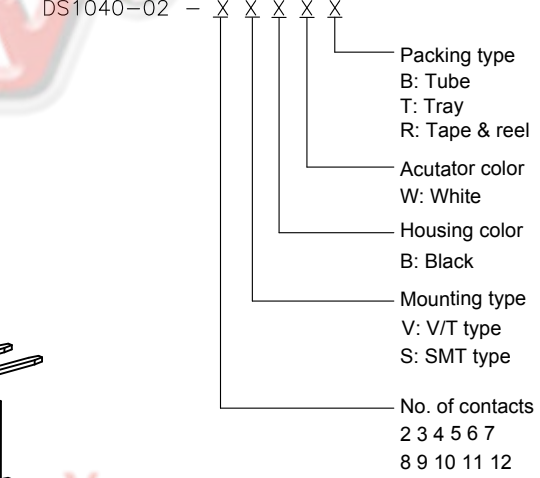

Warning:
During the soldering process,
The switch must be turned off.

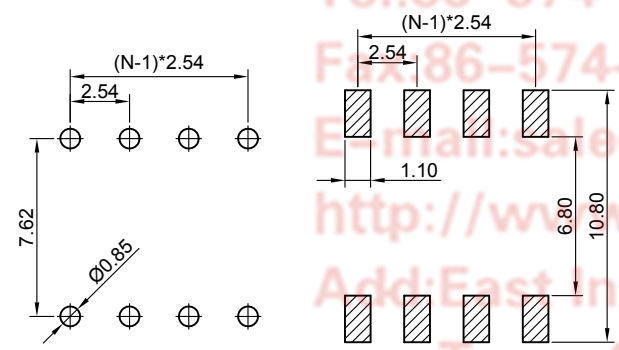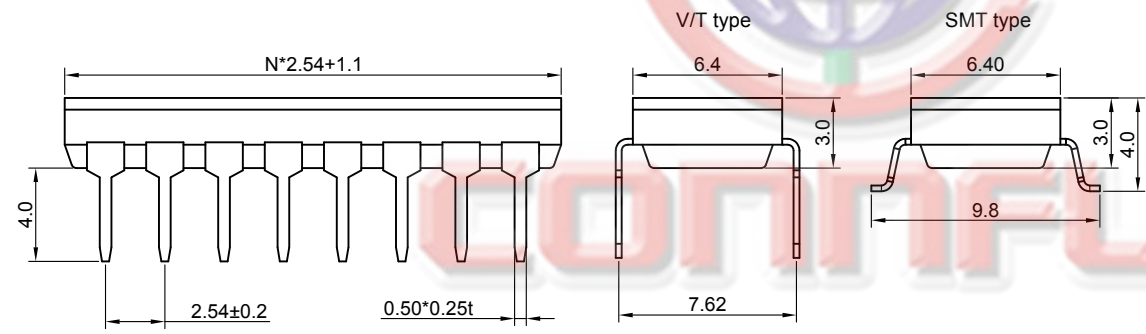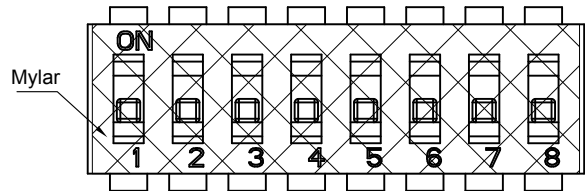

RECOMMEND PCB LAYOUT
(TOLERANCE=±0.05)

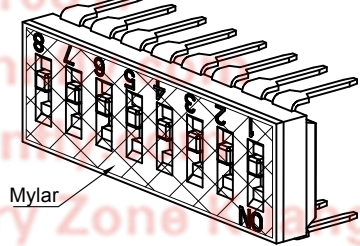

| | | | | | | | |
|-------------------|-------|---------------------|-----|--|----|-------|---|
| GENERAL TOLERANCE | | ANGLE TOLERANCE | | PROJECTION | | TITLE | SWITCH PITCH 2.54mm SMT WITH MYLAR TYPE |
| X. | ±0.60 | X. | ±5° | UNITS | mm | SHEET | DS1040-02 SERIES |
| .X | ±0.38 | .X | ±3° | SHEET SIZE | A4 | | |
| .XX | ±0.25 | .XX | ±2° | | | | |
| DRAWING TYPE | | CUSTOMER | | 晨翔电子有限公司 CONNFLY ELECTRONIC CO. LTD | | | |
| SCALE | | 1:1 | | | | | |
| DRAWING NO. | | C-DS1040-02-XXXXX-B | | | | | |