

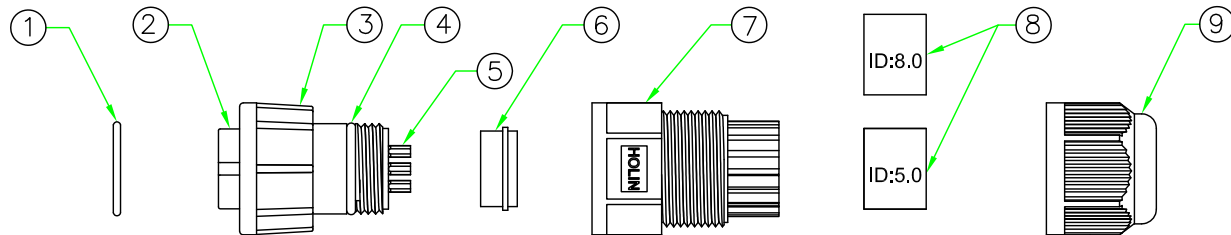


RoHS

IP66-68

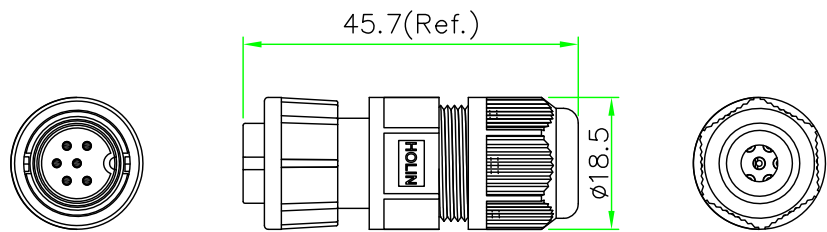

REV.	DESCRIPTION	DATE
A	ISSUE	May/21/2015

NOTES:

1. ELECTRICAL CHARACTERISTICS:

CURRENT RATING: 5A / 10A

CONNECTOR TEMPERATURE RANGE: -20°C TO +80°C


DIELECTRIC WITHSTANDING VOLTAGE:

500V AC FOR ONE MINUTE


2. HOW TO ORDER: CBx-L4xxSA

- 02 - 2 PIN
- 03 - 3 PIN
- 04 - 4 PIN
- 05 - 5 PIN
- 06 - 6 PIN

- P - CURRENT RATING 10A
- D - CURRENT RATING 5A

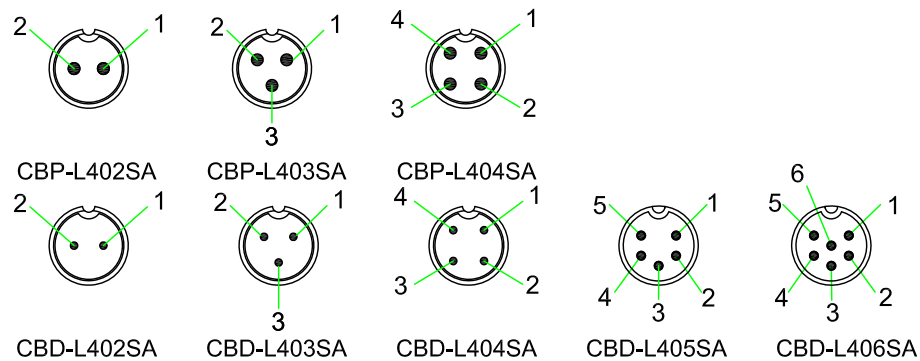

PIN ASSIGNMENT FRONT VIEW
(前視圖)

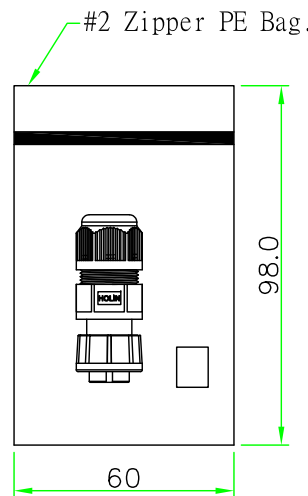

9	CLAMP NUT	NYLON+GF.	BLACK	1	
8	TUBE	Rubber (ID= 5.0 & 8.0mm)	BLACK	2	
7	HOOD	NYLON.	BLACK	1	
6	GASKET	EPDM.	BLACK	1	
5	CONTACT	Brass ,Male Pin. 6u"Gold Plated.		N	
4	O-RING	NBR.	BLACK	1	
3	LOCK NUT	NYLON+GF.	BLACK	1	
2	CONNECTOR	B Size Female Connector Insert, NYLON+GF.	BLACK	1	
1	O-RING	NBR.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

HOLIN® HTP ASIA TECHNOLOGY CO., LTD.
禾凌科技股份有限公司

	UNIT: mm	TITLE :	Circular B Size Lock Type Female Connector Male Pin Field Installable Plug
SCALE	1:1	P/N:	CBx-L4xxSA
UNLESS OTHERWISE SPECIFIED TOLERANCES: .x ± 0.25 .xx ± 0.1 .xxx ± 0.05 ANGLE ± 1°		DWG.NO:	CBx-L4xxSA
REV.	A	SHEET	1/1
		DR.	Patty
		CH.	ERIC
		AP.	