

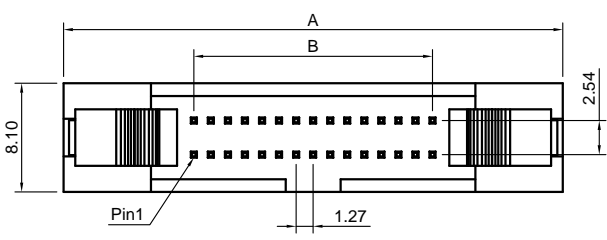


Dept	
Qty	
DC	1
ED	1
IE	1
ISO	1
PD	1
R&D	1
SD	1
QA	1
QC	1
QE	1


The information provided herein is from CONNPLY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNPLY or its affiliates. Unauthorized use or reproduction of any part of this document is strictly prohibited. CONNPLY may enforce its intellectual property rights at its own discretion, failures or delays to exercise such rights does not constitute a waiver of such rights.

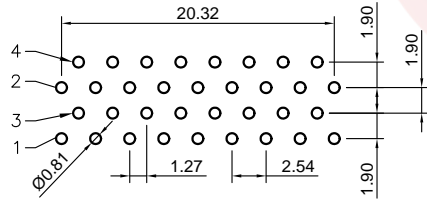

ACCESSORIES	X	Y
LONG LATCH	19.0	10.65
SHORT LATCH	17.5	8.0

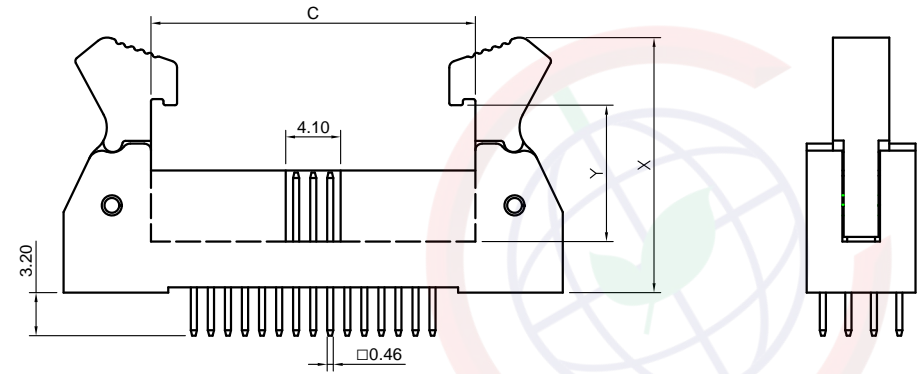

P.C.B Layout (Tolerance:±0.05)  
For Positions 10,26,30,34,50,70,90

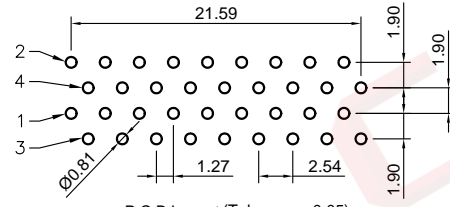

P.C.B Layout (Tolerance:±0.05)  
For Positions 20,40,60,68,80,100



(Series Image-Reference Only)


PINS PER ROW	A	B	C
5	24.50	5.08	11.46
10	30.85	11.43	17.81
13	34.66	15.24	21.26
15	37.20	17.78	24.16
17	39.74	20.32	26.70
20	43.55	24.13	30.51
25	49.90	30.48	36.86
30	56.25	36.83	43.21
34	61.33	41.91	48.29
35	62.60	43.18	49.56
40	68.95	49.53	55.91
45	75.30	55.88	62.26
50	81.65	62.23	68.61

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 04/10/08'		LJC 04/10/08'
B	DRAWING UPDATE	JLZ 08/22/18'		

NOTES:

- Materials
  - Contact: copper alloy
  - Insulation: Thermoplastic(UL94 V-0)
- Specification
  - Temperature:-40°C~+105°C
  - Contact Resistance:30mΩ max.(initial)
  - Insulation Resistance:1,000MΩ min
  - Dielectric Withstanding Voltage:AC 250V Per Minute

3.Product number code:

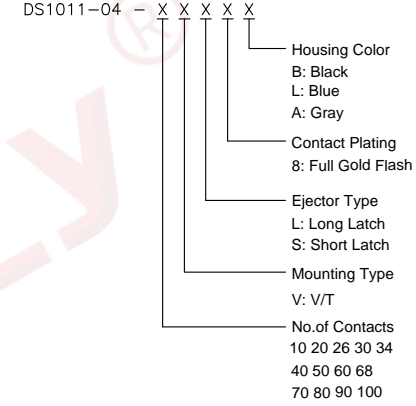

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°
DRAWING TYPE		CUSTOMER	
SCALE		1:1	SHEET 1 OF 1
DRAWING NO.		C-DS1011-04-XXXXXX-B	

PROJECTION		TITLE	
UNITS	mm	SHROUDED HEADER PITCH 1.27*2.54mm	
SHEET SIZE	A4	SERIES	DS1011-04 SERIES

晨翔电子有限公司  
CONNPLY CONNPLY ELECTRONIC CO. LTD