


The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use or reproduction of this information, in any form or by any means, without the prior written permission of CONNELY is strictly prohibited. CONNELY may enforce its intellectual property rights at its own discretion, failures or delays to exercise such rights does not constitute a waiver of such rights.

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LL 07/03/06'		LJC 07/03/06'
B	ADD P/N CODE	JLZ 02/11/15'	HZW 02/11/15'	LJC 02/11/15'
C	DRAWING UPDATE	JLZ 07/21/18'		

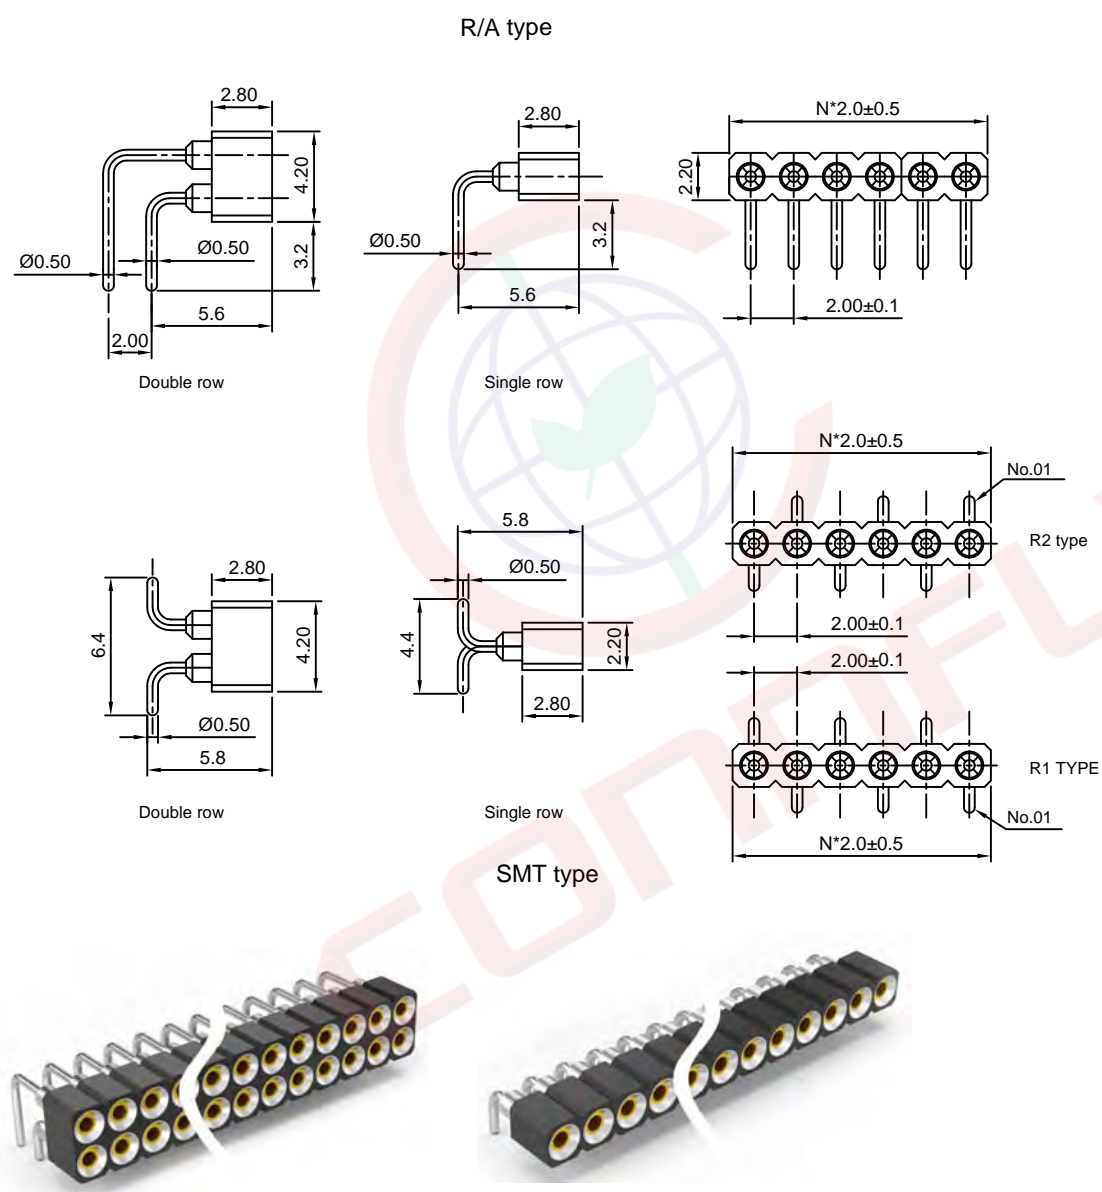

(Series Image-Reference Only)

NOTES:

- Electrical:
  - Current rating:1.5A max.
  - Contact resistance:20mΩ max.
  - Insulation resistance:1000MΩ min at V=100V.
  - Operating voltage:60V AC/DC.

2. Product number code:

DS1002-09 - X X X X X

- Bend type(For single row SMT only)
  - A: R1
  - B: R2
- Clip plating
  - 1: Tin 150u"
  - 2: Tin 200u"
  - 3: G/F
  - 4: Gold 3u"
  - 5: Gold 10u"
  - 6: Gold 15u"
- Pin plating
  - 1: Tin 150u"
  - 2: Tin 200u"
  - 3: G/F
  - 4: Gold 3u"
  - 5: Gold 10u"
  - 6: Gold 15u"
- Mounting type
  - R: R/A type
  - S: SMT type
- No.of contacts
  - 1x1 to 1x40
  - 2x2 to 2x40

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	SMT & R/A IC SOCKET PITCH 2.00mm	
X.	±0.60	X.	±5°	UNITS	mm	MATING PIN Ø0.6		
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1002-09 SERIES	
.XX	±0.25	.XX	±2°	<b>晨翔电子有限公司</b> <b>CONNELY ELECTRONIC CO. LTD</b>				
DRAWING TYPE		CUSTOMER						
SCALE		1:1	SHEET 1 OF 1					
DRAWING NO.		C-DS1002-09-XXXXX-C						