

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 09/04/08'	~	LJC 09/04/08'
B	HOUSING CHANGE	JLZ 06/27/15'	~	

NOTES:





- MATERIAL
 - INSULATOR:THERMOPLASTIC(UL 94V-0).
 - CONTACT MATERIAL:COPPER ALLOY.
- SPECIFICATION
 - CURRENT RATING:1.0 Amp.
 - INSULATION RESISTANCE:1000MΩ Min.
 - DIELECTRIC WITHSTANDING:300VAC.
 - CONTACT RESISTANCE:20mΩ Max.
 - OPERATING TEMPERATURE:-40°C TO+105°C.

3. PART NUMBER: DS1064-14

4. PRODUCT NUMBER CODE:

DS1064-14 - X X X X X - X

- PLATING LEVEL
3A: 3A LEVEL
- PACKING TYPE
B: TUBE
R: TAPE ON REEL
- HOUSING COLOR
B:BLACK
- CONTACT PLATING
8: FULL GOLD FLASH
6: FULL TIN
- MOUNTING TYPE
S:SMT TYPE
- No.OF CONTACTS
06 ~ 40

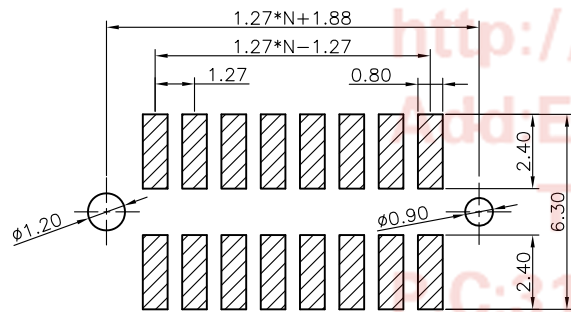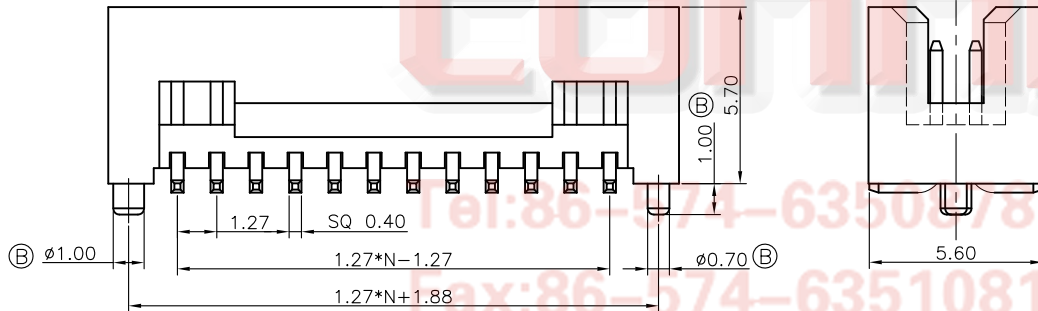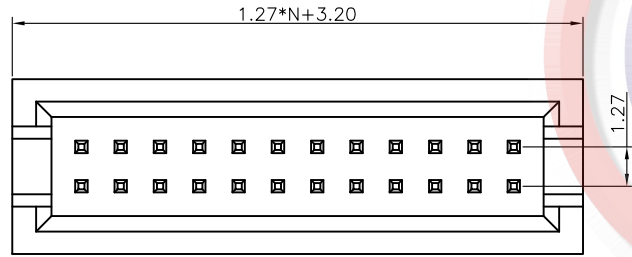

RECOMMEND PCB LAYOUT
(TOLERANCE=±0.05)

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°

PROJECTION	TITLE	1.27mm HEADER PITCH	
UNITS	mm	SMT TYPE W/POST	
SHEET SIZE	A4	SERIES	DS1064-14 SERIES

DRAWING TYPE	CUSTOMER		
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	C-DS1064-14-XXXXXX-X-B		

晨翔电子有限公司
CONNFLY CONNFLY ELECTRONIC CO. LTD