
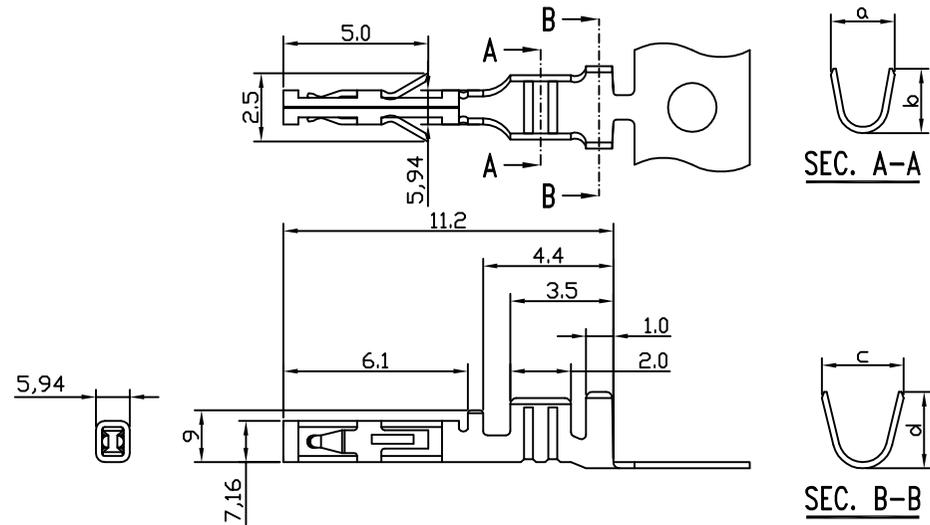


RoHS

Card point type

2 Crimp

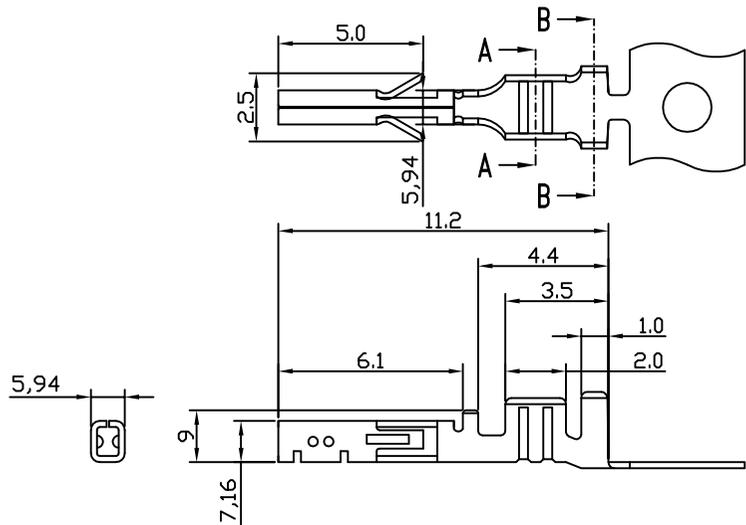

Features:

- Material: Phosphor bronze
- Wire range: #20 ~ #30 AWG
- Thickness: 0.2mm

Specifications:

- Current rating:

Wire size	# 20	# 22	# 24	# 26	# 28	# 30
Ampere	5 A	5 A	4 A	3 A	2 A	1 A
- Voltage rating: 250V AC(RMS) or DC
- Contact resistance: 10mΩ Max.
- Dielectric strength: 1500V AC/minute
- Temperature rise: 30°C Max.
(carry rated current load)

HOW TO ORDER
 SH3002 - T X -T2
 1 2 3 4 5

1.Series No.: SH3002
 2.Product: T:Terminal
 3.Wier Option: A:26-30AWG, Y:20-24AWG
 4.Plating: T:Tin
 5.Contact type: 1:Card point type, 2:2 Crimp

TOLERANCE	
.000	± 0.1 (mm)
.00	± 0.2 (mm)
.0	± 0.3 (mm)
X.	± 0.5 (mm)

Ordering Information

Finished	Wire size	Dim. a	Dim. b	Dim. c	Dim. d
Tin-plated	#26 ~ #30 AWG	1.8	1.6	2.4	1.9
Tin-plated	#20 ~ #24 AWG	2.1	2.1	2.7	2.5

JIA YI ELECTRONIC CO., LTD			UNIT	TITIE	CUSTOMER P.Number	J.Y NUMBER	REV.
			mm	3.0mm pitch terminal tin plated		SH3002-TX-TX	1
DATE:2016/12/15	DRAWING.	APPROVED	SCALE	CUSTOMER Name	DRAWN NO.	Page No	1 of 1
	You kai Yin	Nick	NOT				