



RoHS

IP66-68

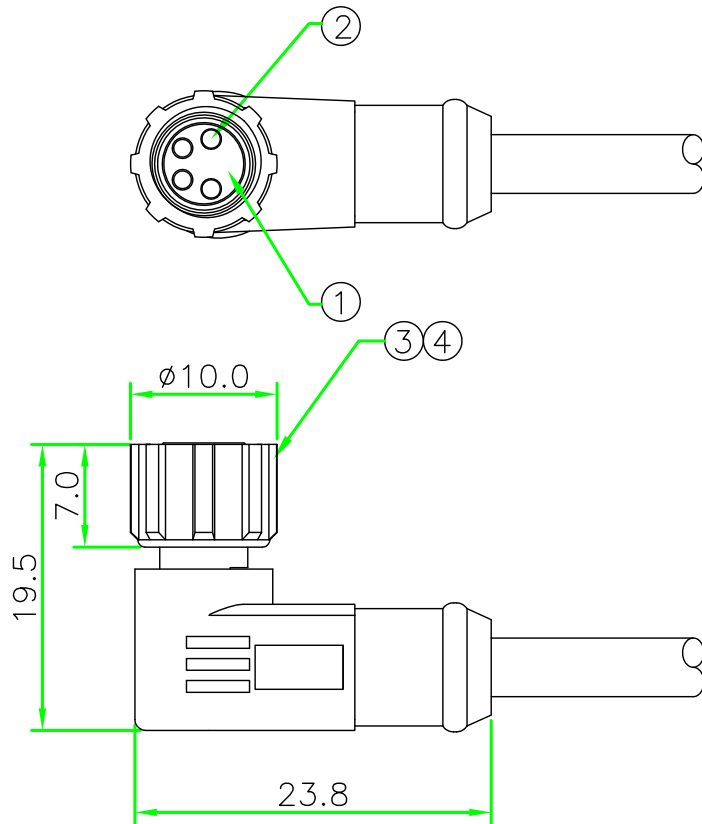

※Cable specification and length can be customized.

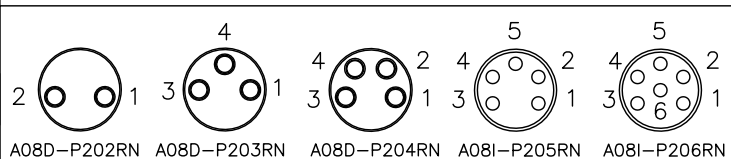

PIN ASSIGNMENT FRONT VIEW
(前視圖)

4	RING NUT	NYLON+GF.			1	
3	O-Ring	VITON.			1	
2	CONTACT	Brass, 6 u" Gold plated .Female Contact.			N	
1	CONNECTOR	M8 A-Coding Female Connector Insert.NYLON+GF.	BLACK		1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS	

REV.	DESCRIPTION	DATE
A	ISSUE	Apr/30/2015

Ref.

NOTES:

1. ELECTRICAL CHARACTERISTICS:

CURRENT RATING: 1.5A / 3A

TEMPERATURE RANGE: -20°C TO +80°C

DIELECTRIC WITHSTANDING VOLTAGE:

500V AC FOR ONE MINUTE

2. HOW TO ORDER: A08x-P2xxRN

02 - 2 PINS 05 - 5 PINS

03 - 3 PINS 06 - 6 PINS

04 - 4 PINS

I - CURRENT RATING 1.5A

D - CURRENT RATING 3A

HOLIN® HTP ASIA TECHNOLOGY CO., LTD.
禾凌科技股份有限公司

	UNIT: mm	TITLE :	M8 A-Coding Female R/A molded cable
SCALE	2:1	P/N:	A08x-P2xxRN
UNLESS OTHERWISE SPECIFIED TOLERANCES: .X ± 0.25 .XX ± 0.1 .XXX ± 0.05 ANGLE ± 1°		DR.	Patty
REV.	SHEET	CH.	ERIC
A	1/1	DWG.NO:	A08x-P2xxRN
		AP.	