

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	HP 07/12/05		

TECHNICAL DATA

1. MATERIAL

- . Pin(Outer Sleeve): Brass,Machined,CuZn38Pb2
- . Clip(Contact 4/6 Finger): Copper alloy,Heat Treated

2. ELECTRICAL

- . Current Rating: 1A Per Pin max.
- . Contact Resistance: $\leq 20m\Omega$ /Contact.

3. MECHANICAL

- . *Average Insertion Force With Steel Pin of $\phi 0.31mm/0.012''$:
6-Finger $\leq 120g$
- . *Average Withdrawal Force With Steel Pin of $\phi 0.31mm/0.012''$:
6-Finger $\geq 15g$
- . *Mechanical Life: min 200 Cycles


4. PRODUCT NUMBER CODE:

DS1005-06 - X X X

CLIP PLATED
 6: Full Tin
 8: Full Gold flash
 C: Full Gold 3u"
 A: Full Gold 10u"
 B: Full Gold 15u"

PIN PLATED
 6: Full Tin
 8: Full Gold flash
 C: Full Gold 3u"
 A: Full Gold 10u"
 B: Full Gold 15u"

CLIPS
 3: 3Finger
 4: 4Finger
 6: 6Finger
 SERIES NO
 DS1005-06

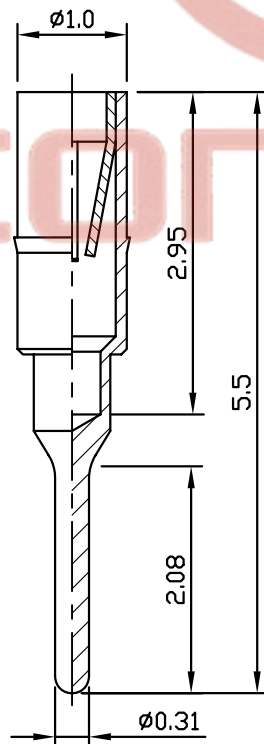

Tel:86-574-63508787
 Fax:86-574-63515117
 E-mail:sale@zhennfly.com.cn
 Http://www.connfly.com

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	SOCKET TERMINALS 5.5mm	
X.	± 0.20	X.	$\pm 2^\circ$	UNITS	mm	SERIES	DS1005-06	
.X	± 0.10	.X	$\pm 1^\circ$	SHEET SIZE	A4			
.XX	± 0.05	.XX	$\pm 0.5^\circ$					
DRAWING TYPE		CUSTOMER			晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO. LTD			
SCALE		1:1	SHEET	1 OF 1				
DRAWING NO.		C-DS1005-06-XXX						