

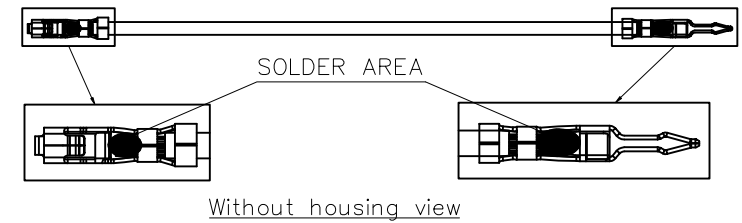


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	Andy_H 01/20/16'		LJC 01/20/16'


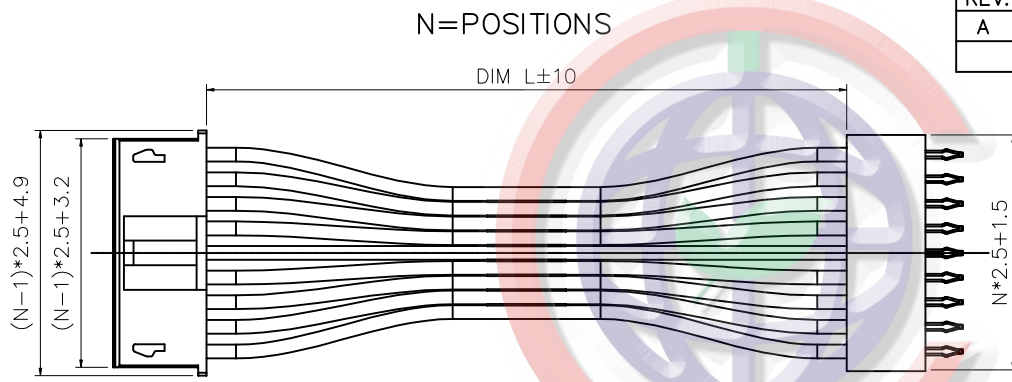


Number Code:
DS1069-10-X X X X X

- Wire Length(DIM L):
080: 80mm
150: 150mm
- Contact Plating:
6: Full Tin ; 8: Full Gold
- Housing Color:
W: White
- Wire Gauge:
26: AWG 26#; 24: AWG 24#
- Mounting type:
C: Crimp
W: Crimp+Soldering
- No. of contacts: 03~15

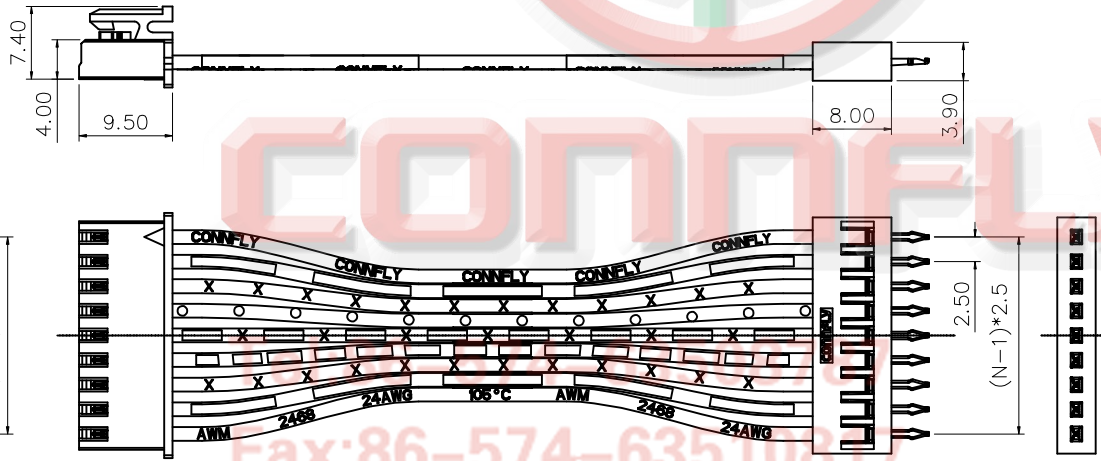

- NOTES:
- MAIN SPECIFICATIONS
 - Housing material: NYLON 66
 - Contact: Copper Alloy
 - Wire range: AWG#26(2468)
 - Rated voltage: 250V
 - Rated current: 1A
 - Contact resistance: $\leq 100m\Omega$
 - Insulation resistance: $\geq 1000M\Omega$
 - Withstanding voltage: 500V, AC 1 minute
 - Temperature range: $-20 \sim +80^{\circ}C$

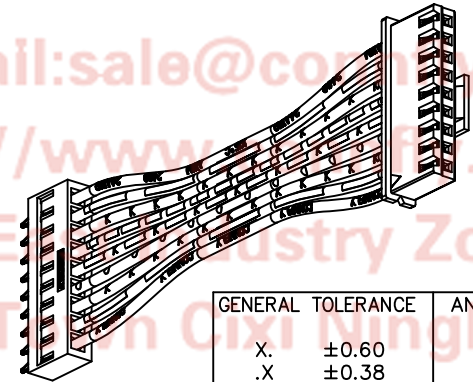

RECOMMENDED PCB LAYOUT
(TOLERANCE = ±0.05)

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION	TITLE
X	±0.60	X	±3°		2.5mm XH+SCN TYPE CABLE
.X	±0.38	.X	±2°	UNITS	mm
.XX	±0.25	.XX	±1°	SHEET SIZE	A4
DRAWING TYPE				CUSTOMER	SERIES
SCALE				1:1	SHEET
DRAWING NO.				C-DS1069-10-XXXXXX-A	1 OF 1
					WITH CRIMP+SOLDERING
					DS1069-10 SERIES