





RoHS

7		8
REV	Date	Description

SPECIFICATIONS

1. Current rating: 5A AC, DC
2. Voltage rating: 250V AC,DC
3. Temperature range: -40°C ~ +105°C
4. Insulation resistance: 1000MΩ Min.
5. Withstanding voltage: 1500V AC/ minute.
6. Contact resistance: 10mΩ Max.

Material: PA66 UL94 V-0 or V-2
 Circuits: 2*2~2*12
 Suitable:SH3002 series terminal
 Mate With SH3001 series dual row housing
 and SH3002 series dual row wafer

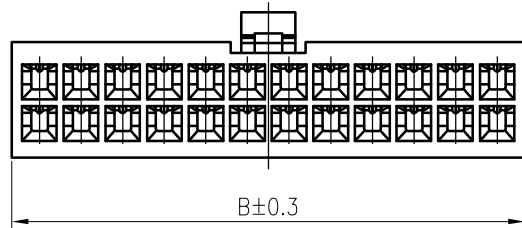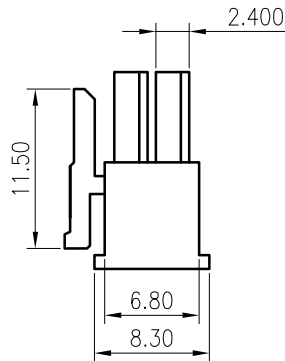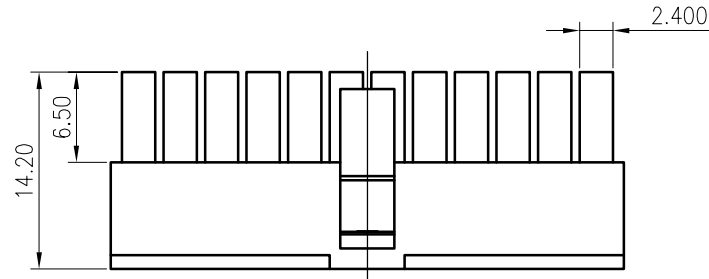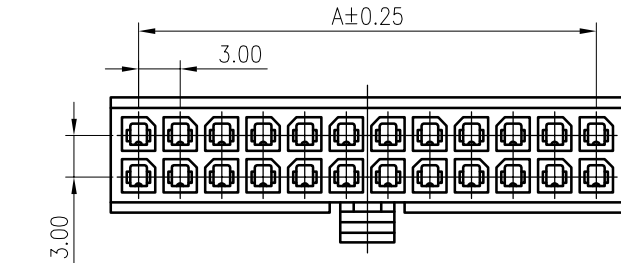

HOW TO ORDER

SH3002-H-D-XX
 1 2 3 4

1. Series No. : SH3002	3. Row Type: S:Single Row D:Dual Row
2. Product: H:Housing W:WAFER T:Terminal	4. Contact No. : 02-12P (Single Row) 02-24P (Dual Row)

Circuits	Dimensions	
	A	B
2*1P	3.0	5.50
2*2P	3.0	8.50
2*3P	6.0	10.00
2*4P	9.0	13.00
2*5P	12.0	16.00
2*6P	15.0	19.00
2*7P	18.0	22.00
2*8P	21.0	25.00
2*9P	24.0	28.00
2*10P	27.0	31.00
2*11P	30.0	34.00
2*12P	33.0	37.00

JIA YI ELECTRONIC CO., LTD			UNIT	TITIE	CUSTOMER P.Number	J.Y NUMBER	REV.
			mm			SH3002-H-D-1	1
DATE:2023/02/21	DRAWING.	APPROVED	SCALE	CUSTOMER Name	DRAWN NO.	Page No	1 of 1
	You kai Yin	Nick	NOT				