

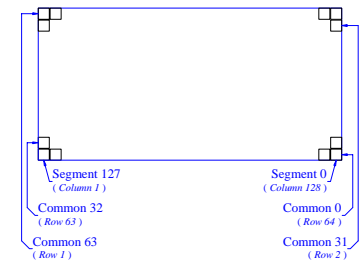



Item	Date	Remark
A	20120323	Original Drawing

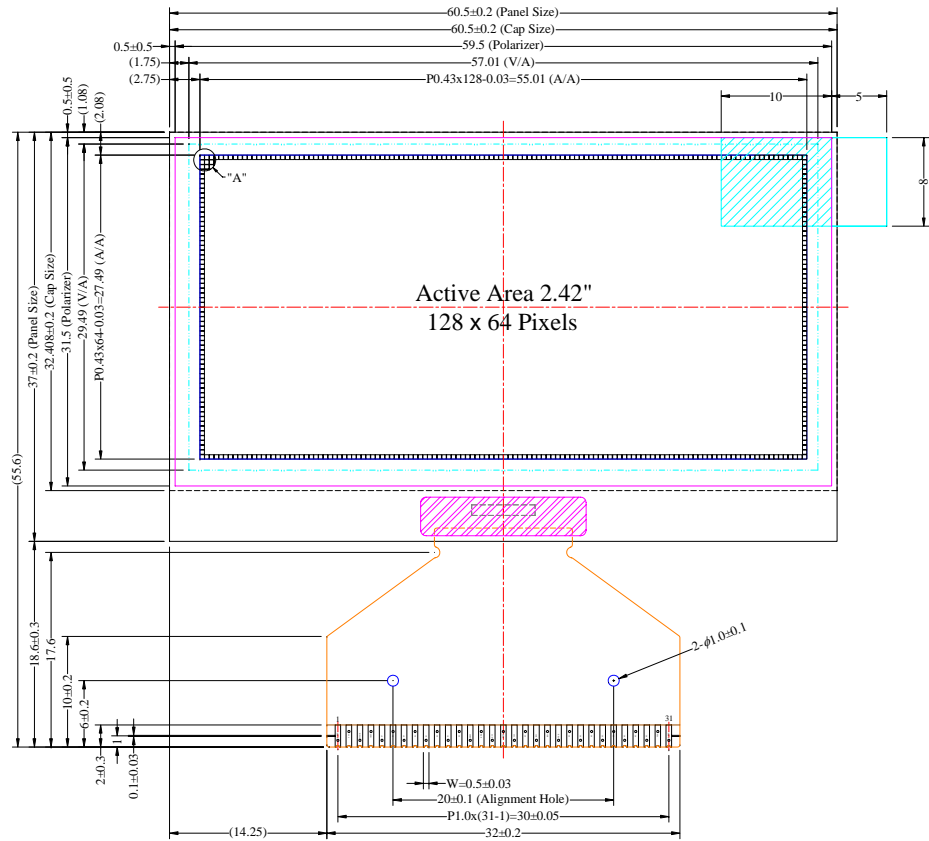

Pin	Symbol
1	N.C. (GND)
2	VCC
3	VCOMH
4	IREF
5	D7
6	D6
7	D5
8	D4
9	D3
10	D2
11	D1
12	D0
13	ERD#
14	R/W
15	DC#
16	RES#
17	CS#
18	NC
19	BS2
20	BS1
21	VDD
22	N.C.
23	N.C.
24	N.C.
25	N.C.
26	N.C.
27	N.C.
28	N.C.
29	N.C.
30	VSS
31	N.C. (GND)

- Notes:
1. Color: White
  2. Driver IC: SSD1309
  3. FPC Number: UT-0205-P18
  4. Interface:  
8-bit 68XX/80XX Parallel, 4-wire SPI, I2C
  5. General Tolerance: ±0.30
  6. The total thickness (2.10 Max) is without polarizer protective film & remove tape.  
The actual assembled total thickness with above materials should be 2.35 Max.

Customer Approval Signature	<b>WiseChip Semiconductor Inc.</b>							Drawing Number	Rev.	
								DMX2864SDGFAT	A	
	Title							Material		
	UG-2864ASWPG14 Folding Type OEL Display Module Pixel Number: 128 x 64, Monochrome, COG Package							Soda Lime / Polyimide		
								Scale	Sheet	Size
Unless Otherwise Specified		Title		Drawn	E.E.	Panel / E.	P.M.	1:1	1 of 1	A3
Unit	mm			Gary Lin	Ting-Kuo Hu	Ivy Lo	Tiffany Hsu			
General Roughness				Date	20120323	20120323	20120323	20120323		
Tolerance										
Dimension	±0.3									
Angle	±1									