REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 06/09/15'		

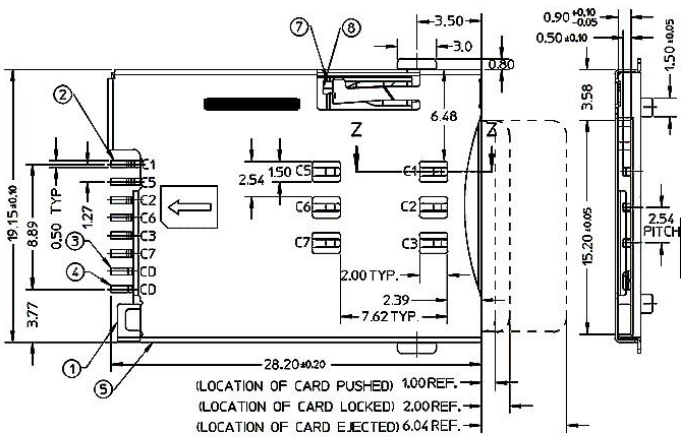





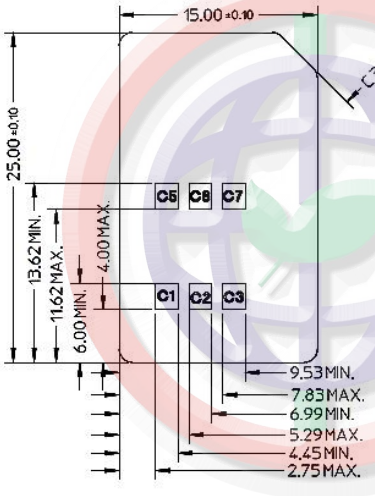

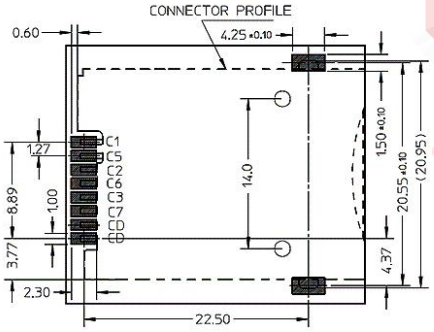



Notes:
1.Material:
1.1. Housing: High Temperature UL 94V-0.
1.2. Contacts: Copper Alloy. Selective Gold Flash.
1.3. Shell:Stainless Steel.
2.Specifications:
2.1. Operate Temperature: -40° C~+85° C
2.2. Insulation Resistance: 1000MΩ Min.
2.3. Contact Resistance: 50mΩ max.
2.4. Withstanding Voltage: 500V AC 1min.
2.5. Voltage Rating: 30V AC/DC
2.6. Current Rating: 0.5A
3.Poduct Number Code:

DS1138-10 - XX X X X X X X

- XX: No. of contacts 08:8pin
- X: Connector type S: Socket
- X: Mounting type S: SMT type
- X: Contact Plating 0: Selective gold flash 4: Selective 3u" gold J: Selective 5u" gold 1: Selective 10u" gold
- X: Housing color B: Black
- X: Post Support S: W/ Post
- X: Packing Type R: Tape On Reel B: Tube

NO.	DESCRIPTION	Q'TY	MATERIAL
1	HOUSING	1	HIGH TEMPERATURE THERMOPLASTIC
2	TERMINAL	6	COPPER ALLOY
3	DETECT PIN LOWER	1	COPPER ALLOY
4	DETECT PIN UPPER	1	COPPER ALLOY
5	SHELLL	1	STAINLESS STEEL
6	COIL SPRING	1	PIANO WIRE
7	HEART CAM	1	HIGH TEMPERATURE THERMOPLASTIC
8	CAM PIN	1	STAINLESS STEEL

CONNFLY®
Tel:86-574-63508787
Fax:86-574-63510817
E-mail:sale@connfly.com
http://www.connfly.com
Add:East Industry Zone KuangYan
Town Cixi Ningbo China
P.C:315323

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°

DRAWING TYPE	CUSTOMER		
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	C-DS1138-10-XXXXXXX-A		

PROJECTION		TITLE	2.54mm SIM Card H=1.8mm 6+2 Positions SMT Type With Post
UNITS	mm		
SHEET SIZE	A4	SERIES	DS1138-10 SERIES

晨翔电子有限公司
CONNFLY® CONNFLY ELECTRONIC CO., LTD