
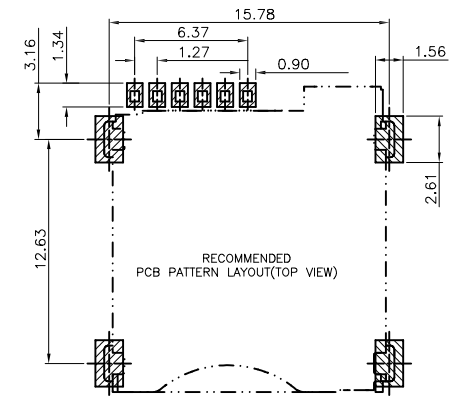
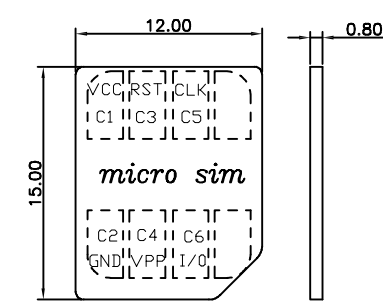
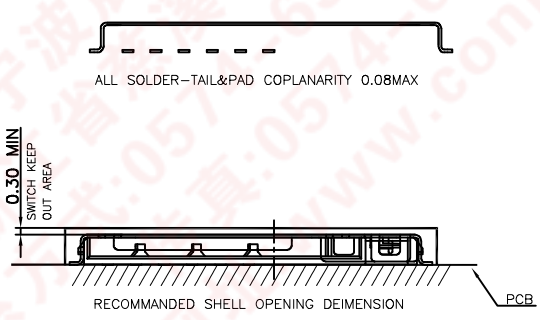
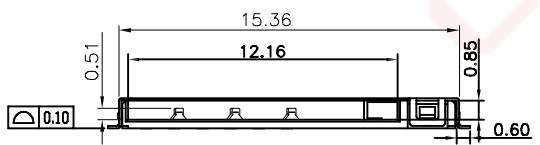


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 12/02/15'		

- Notes:
- Material:
    - Housing: High Temperature UL 94V-0.
    - Contacts: Copper Alloy. Selective Gold Flash.
    - Shell: Stainless Steel.
  - Specifications:
    - Operate Temperature:  $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$
    - Insulation Resistance: 1000M $\Omega$  Min.
    - Contact Resistance: 50m $\Omega$  max.
    - Withstanding Voltage: 500V AC 1min.
    - Voltage Rating: 30V AC/DC
    - Current Rating: 0.5A
  - Product Number Code:  
DS1138-11 - XX X X X X X X
    - Packing Type
    - R: Tape On Reel
    - Housing color
    - B: Black
    - Contact Plating
    - 0: Selective gold flash
    - Mounting type
    - S: SMT type
    - Connector type
    - S: Socket
    - No. of contacts
    - 06: 6pin

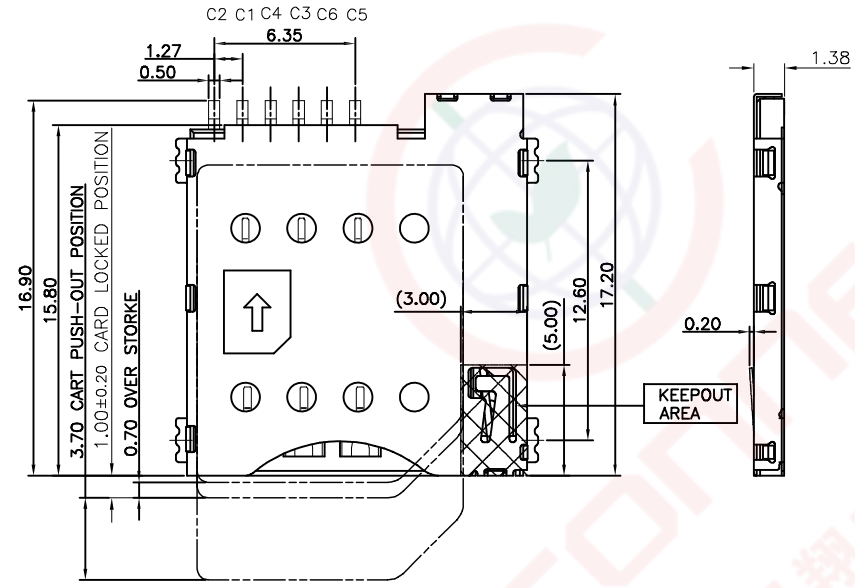

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION	TITLE	Micro SIM Card H=1.38mm 6 Positions SMT Type	
X.	$\pm 0.60$	X.	$\pm 5^{\circ}$		mm		
.X	$\pm 0.38$	.X	$\pm 3^{\circ}$		A4	SERIES	DS1138-11 SERIES
.XX	$\pm 0.25$	.XX	$\pm 2^{\circ}$				
DRAWING TYPE		CUSTOMER		<b>晨翔电子有限公司</b> <b>CONNFLY® CONNFLY ELECTRONIC CO., LTD</b>			
SCALE		1:1					
DRAWING NO.		C-DS1138-11-XXXXXXX-A					