
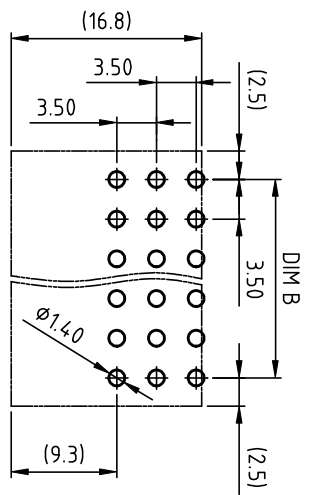

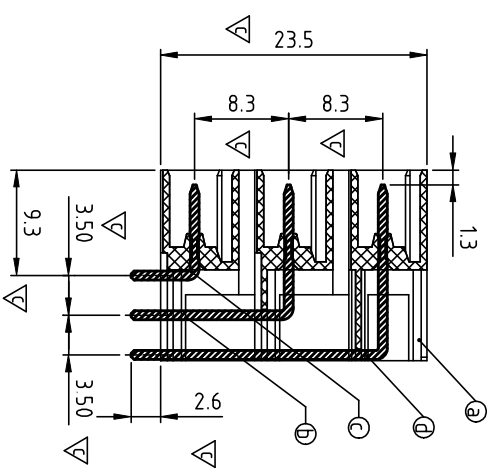


SIGN	DATE	DESCRIPTION	APPROVER
Δ			

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!

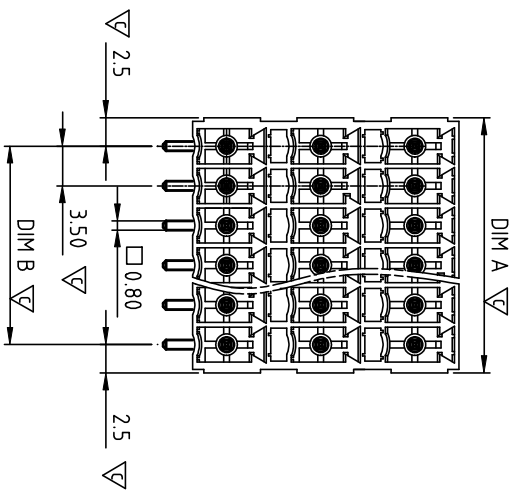

PCB Layout

N=NUMBER OF CONTACTS

DIM	TOL	
	3x2P--3x5P	3x6P--3x16P
Dim A (N/3-1)x3.5+5.0	±0.20	±0.25
Dim B (N/3-1)x3.5		±0.30

- Material:
- Item Ⓐ Terminal(housing): PA66 30% GF (UL 94V-0)
 - Item Ⓑ Contact pin of short: copper Tin plated
 - Item Ⓒ Contact pin of long: copper Tin plated
 - Item Ⓓ Contact pin of best long: copper Tin plated
- Electrical:
- Voltage rating: 160V
 - Current rating: 5.5A
 - Withstanding Voltage: 1.32 KV
 - Operating temperature: -40°C to +115°C
 - Soldering temperature: 250°C ±10°C/5 Sec
 - APPROVAL:
 - Critical dimension: ∇

K3 XX 1 1 X 1 XXXX G

No. OF POLES
 06: 3x2 POLES
 09: 3x3 POLES
 :
 :
 72: 3x24 POLES

COLOR
 0 Black (RAL9005)
 3 Orange(RAL2011/P)
 5 Green(RAL6018/T)
 6 Blue (RAL5015/A)
 8 Grey(RAL7035/D)

A000: "Ⓐ" Logo (Standard)
 A00A: "ANYTEK" Mark

Any special item by customer request. please contact sales department.

RoHS compliant (lead<4%)
 In copper Alloy

ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATSOEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE	K3 3.5mm W/O Flange Series (90°-Right angle) DIP type		DWG NO.	8K30007	Tolerance
PART NO.	K3xx11x1xxxxG		CUST NO.		X.X X.X X.XX ±1°
APPROVED	CHECKED	DESIGNED	DRAWN		±0.50 ±0.30 ±0.10
	Runner	2010.09.18	Runner	2010.06.28	SCALE: NONE
					REV: B
					SHEET: 01/01