

| REV. | DESCRIPTION | DRAWN | CHECKED | APPROVED |
|------|-------------|-------------|---------|----------|
| A | NEW RELEASE | HP 07/13/05 | | |
| | | | | |
| | | | | |

TECHNICAL DATA

- MATERIAL
 - Pin(Outer Sleeve): Brass,Machined,CuZn38Pb2
 - Clip(Contact 4/6 Finger): Copper alloy,Heat Treated
- ELECTRICAL
 - Current Rating: 3A Per Pin max.
 - Contact Resistance: $\leq 20m\Omega$ /Contact.

- MECHANICAL
 - *Average Insertion Force With Steel Pin of $\phi 0.43mm/0.017"$:
4-Finger $\leq 270g$,6-Finger $\leq 120g$
 - *Average Withdrawal Force With Steel Pin of $\phi 0.50mm/0.020"$:
4-Finger $\geq 25g$,6-Finger $\geq 15g$
 - *Mechanical Life: min 200 Cycles

4. PRODUCT NUMBER CODE:


DS1005-17 - X X X

CLIP PLATED
 6: Full Tin
 8: Full Gold flash
 C: Full Gold 3u"
 A: Full Gold 10u"
 B: Full Gold 15u"

PIN PLATED
 6: Full Tin
 8: Full Gold flash
 C: Full Gold 3u"
 A: Full Gold 10u"
 B: Full Gold 15u"

CLIPS
 3: 3Finger
 4: 4Finger
 6: 6Finger

SERIES NO
 DS1005-17

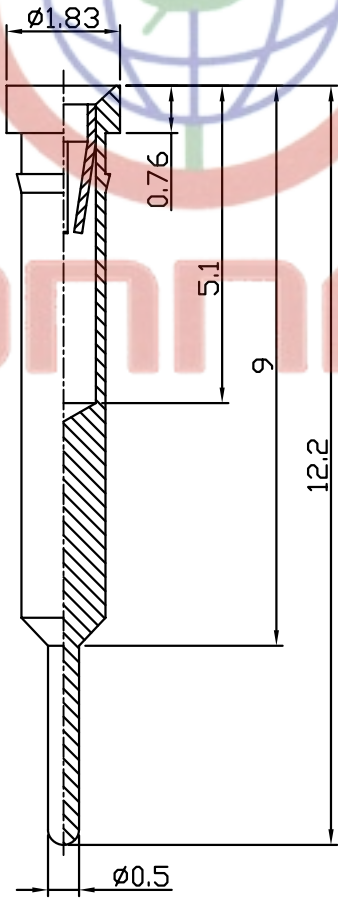

Tel:86-574-6350878/
 Fax:86-574-6351081/
 E-mail:sale@zhenqin.com.cn
 Http://www.connfly.com

| | | | | | |
|-------------------|---------------------|------------|--------|--------|-------------------------|
| GENERAL TOLERANCE | ANGLE TOLERANCE | PROJECTION | | TITLE | SOCKET TERMINALS 12.2mm |
| X. ± 0.20 | X. $\pm 2^\circ$ | UNITS | mm | SERIES | DS1005-17 |
| .X ± 0.10 | .X $\pm 1^\circ$ | SHEET SIZE | A4 | | |
| .XX ± 0.05 | .XX $\pm 0.5^\circ$ | | | | |
| DRAWING TYPE | CUSTOMER | | | | |
| SCALE | 1:1 | SHEET | 1 OF 1 | | |
| DRAWING NO. | C-DS1005-17-XXX | | | | |

晨翔电子有限公司
CONNFLY CONNFLY ELECTRONIC CO. LTD