



TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,
Taoyuan, 324, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532

E-mail: tstsales@mail.taisaw.com Web: www.taisaw.com

Product Specifications Approval Sheet

Product Description: Crystal Unit 6.0x2.0 32.768KHz

TST Part No.: TZ0756A

Customer Part No.: _____

Customer signature required
Company: _____
Division: _____
Approved by : _____
Date: _____

Checked by: _____ Ginger Hung *Ginger Hung*

Approved by: _____ Kelly Hung *Kelly Hung*

Date: _____ 04/03/2012

1. Customer signed back is required before TST can proceed with sample build and receive orders.
2. Orders received without customer signed back will be regarded as agreement on the specifications.
3. Any specifications changes must be approved upon by both parties and a new revision of specifications shall be released to reflect the changes.



TAI-SAW TECHNOLOGY CO., LTD.

6.0x2.0 32.768KHz Crystal Unit

MODEL NO.: TZ0756A

REV. NO.: 3.0

Revise:

Rev.	Rev. Page	Rev. Account	Date	Ref. No.	Reviser
1	N/A	Initial release	02/20/06'	N/A	Robert Chang
2	P3	RoHS Categorical Change	01/08/10'	1.0	Quinton Lo
3	P3	Change Marking	04/03/12'	2.0	Ginger Huang



TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,
Taoyuan, 324, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532

E-mail: tstsales@mail.taisaw.com Web: www.taisaw.com



32.768kHz Crystal Unit


MODEL NO.: TZ0756A

REV. NO.: 3.0


Electrical Specifications:

TZ0756A	Specification
Nominal Frequency	32.768000 KHz
Operating Temperature Range	-30°C to +80°C
Turnover temperature	25+/-5 °C
Parabolic curvature constant	-0.034 +/- 0.006 ppm/per. °C
Frequency Make Tolerance (FL)	+/-20 ppm at 25 +/-2 °C
Equivalent Series Resistance (ESR)	50K Ω max.
Drive Level	1.0 uW max.
Load Capacitance (CL)	12.5 pF
Aging	+/-5.0 ppm/year
Insulation Resistance	500M Ω/100+/-15 VDC
Marking	No Marking

Mechanical Dimensions (mm) :

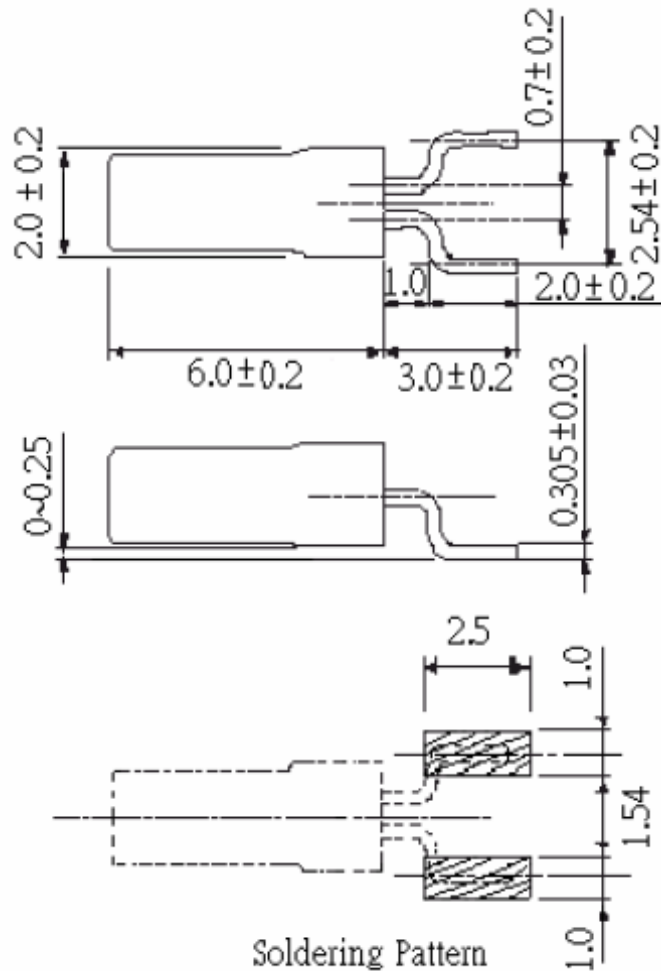

Soldering Reflow :

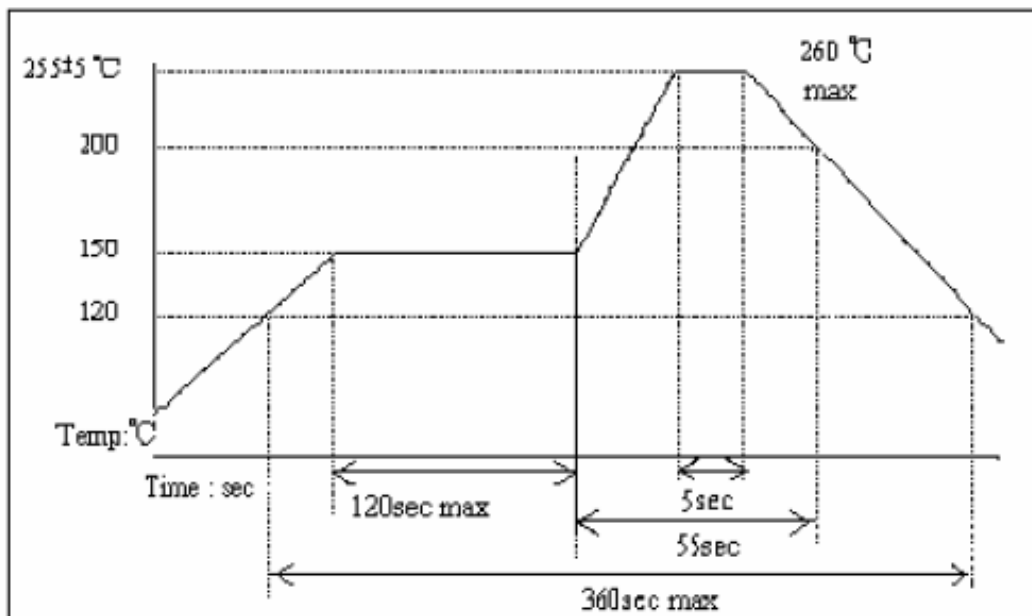

Note: Heating up the package must be less than 150 degrees/5sec.

Reliability Specifications

Test name	Test process / method	Reference standard
Mechanical characteristics		
resistance to Soldering heat (IR reflow)	Temp./ Duration : 260°C /10sec ×2 times Total time : 4min.(IR-reflow)	EIAJED-4701 -300(301)M(II)
Vibration	Total peak amplitude : 1.5mm Vibration frequency : 10 to 55 Hz Sweep period : 1.0 minute Vibration directions : 3 mutually perpendicular Duration : 2 hr / direc.	MIL-STD 202F method 201A
Mechanical Shock	directions : 3 impacts per axis Acceleration : 3000g's, +20/-0 % Duration : 0.3 ms (total 18 shocks) Waveform : Half-sine	MIL-STD 202F method 213C
Solderability	Solder Temperature:265±5°C Duration time: 5±0.5 seconds.	MIL-STD 883G method 2003
Environmental characteristics		
Thermal Shock	Heat cycle conditions -55 °C (30min) ↔ 125 °C (30min) * cycle time : 10 times	MIL-STD 883G method 1010.7
Humidity test	Temperature : 70 ± 2 °C Relative humidity : 90~95% Duration : 96 hours	MIL-STD 202F method 103B
Dry heat (Aging test)	Temperature : 125 ± 2 °C Duration : 168 hours	MIL-STD 883G method 1008.2 condition C
PCT test	Pressure: 2.06kg/cm ² (2.03*10 ⁵ pa) Temperature : 121 ± 2 °C Relative humidity : 100% Duration : 24 hours	EIAJED-4701-3 B-123A