
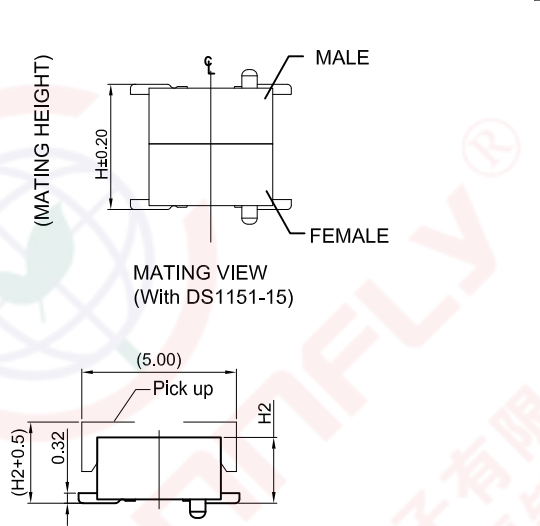


Dept		Qty		TYPE NO.		1		2		REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED			
DC	1	ED	1	MATING HEIGHT	3.0	3.5	4.0	4.5	5.0	5.5	6.0	6.5	A	NEW RELEASE	JLZ 03/21/19'		
IE	1	ISO	1	FEMALE H1	1.40					2.00							
PD	1	R&D	1	FEMALE H2	2.125					3.525							
SD	1	QA	1	MALE H1	0.925	1.425	1.925	1.025	1.525	2.025	2.525	3.025					
QC	1	QF	1														

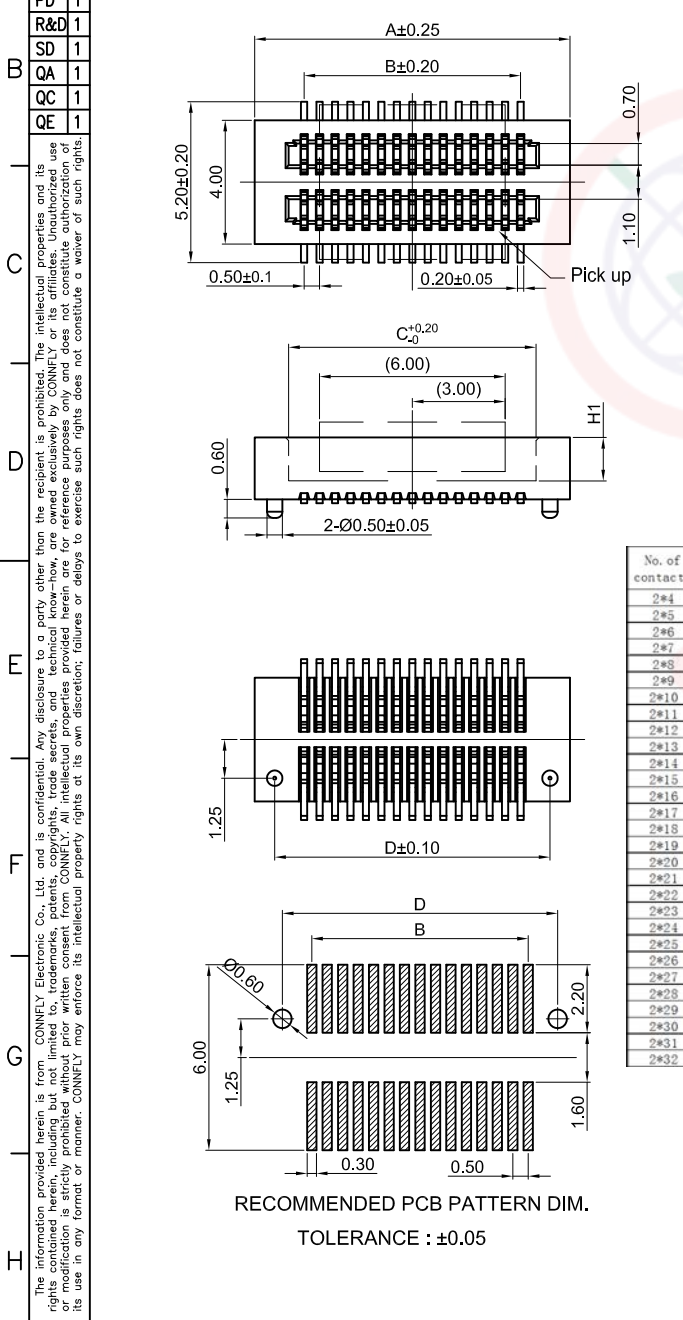

No. of contacts	Dimensions				No. of contacts	Dimensions			
	A	B	C	D		A	B	C	D
2*4	4.7	1.5	2.5	3.4	2*33	19.2	16.0	17.0	17.9
2*5	5.2	2.0	3.0	3.9	2*34	19.7	16.5	17.5	18.4
2*6	5.7	2.5	3.5	4.4	2*35	20.2	17.0	18.0	18.9
2*7	6.2	3.0	4.0	4.9	2*36	20.7	17.5	18.5	19.4
2*8	6.7	3.5	4.5	5.4	2*37	21.2	18.0	19.0	19.9
2*9	7.2	4.0	5.0	5.9	2*38	21.7	18.5	19.5	20.4
2*10	7.7	4.5	5.5	6.4	2*39	22.2	19.0	20.0	20.9
2*11	8.2	5.0	6.0	6.9	2*40	22.7	19.5	20.5	21.4
2*12	8.7	5.5	6.5	7.4	2*41	23.2	20.0	21.0	21.9
2*13	9.2	6.0	7.0	7.9	2*42	23.7	20.5	21.5	22.4
2*14	9.7	6.5	7.5	8.4	2*43	24.2	21.0	22.0	22.9
2*15	10.2	7.0	8.0	8.9	2*44	24.7	21.5	22.5	23.4
2*16	10.7	7.5	8.5	9.4	2*45	25.2	22.0	23.0	23.9
2*17	11.2	8.0	9.0	9.9	2*46	25.7	22.5	23.5	24.4
2*18	11.7	8.5	9.5	10.4	2*47	26.2	23.0	24.0	24.9
2*19	12.2	9.0	10.0	10.9	2*48	26.7	23.5	24.5	25.4
2*20	12.7	9.5	10.5	11.4	2*49	27.2	24.0	25.0	25.9
2*21	13.2	10.0	11.0	11.9	2*50	27.7	24.5	25.5	26.4
2*22	13.7	10.5	11.5	12.4	2*51	28.2	25.0	26.0	26.9
2*23	14.2	11.0	12.0	12.9	2*52	28.7	25.5	26.5	27.4
2*24	14.7	11.5	12.5	13.4	2*53	29.2	26.0	27.0	27.9
2*25	15.2	12.0	13.0	13.9	2*54	29.7	26.5	27.5	28.4
2*26	15.7	12.5	13.5	14.4	2*55	30.2	27.0	28.0	28.9
2*27	16.2	13.0	14.0	14.9	2*56	30.7	27.5	28.5	29.4
2*28	16.7	13.5	14.5	15.4	2*57	31.2	28.0	29.0	29.9
2*29	17.2	14.0	15.0	15.9	2*58	31.7	28.5	29.5	30.4
2*30	17.7	14.5	15.5	16.4	2*59	32.2	29.0	30.0	30.9
2*31	18.2	15.0	16.0	16.9	2*60	32.7	29.5	30.5	31.4
2*32	18.7	15.5	16.5	17.4					

Notes:
 Specifications:
 1. Contact Resistance: 80mΩ Max.
 2. Insulation Resistance: 1000MΩ Min.
 3. Dielectric Withstanding Voltage: 150V AC(rms) For 1 Minute.
 4. Current Rating:0.5A/Pin.
 5. Voltage Rating:60V AC rms.
 6. Temperature: -40°C~+85°C.
 Materials:
 1. Contact Material: Copper Alloy.
 2. Contact Plating: Gold Plating Over Nickel.
 3. Insulator Material: PA9T,Black,UL94-V0.
 Product Number Code:

DS1151-16 - X X X X X X X X
 Profile Height(Dim.H1 H2)
 1:Type 1
 2:Type 2
 Packing Type
 R:Tape On Reel
 Pick up Support
 S:W/ Pick up
 Housing Color
 B:Black
 Contact Plating
 8:Full Gold Flash
 Mounting Type
 S:SMT Type
 Connector Type
 S:Socket
 No.of Contacts
 2x4~2x60

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	0.50mm Board to Board SMT Double Groove Female Type
X.	±0.60	X.	±5°	UNITS	mm	SHEET	
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1151-16 SERIES
.XX	±0.25	.XX	±2°	晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO. LTD			
DRAWING TYPE		CUSTOMER					
SCALE		1:1					
DRAWING NO.		C-DS1151-16-XXXXXXX-A					

The information provided herein is from CONNLY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNLY or its affiliates. Unauthorized use or reproduction of this information in any format or manner. CONNLY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.