

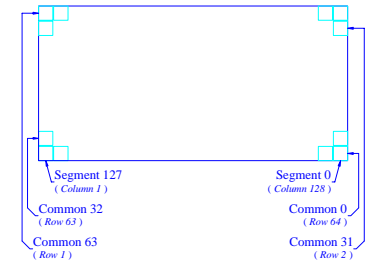
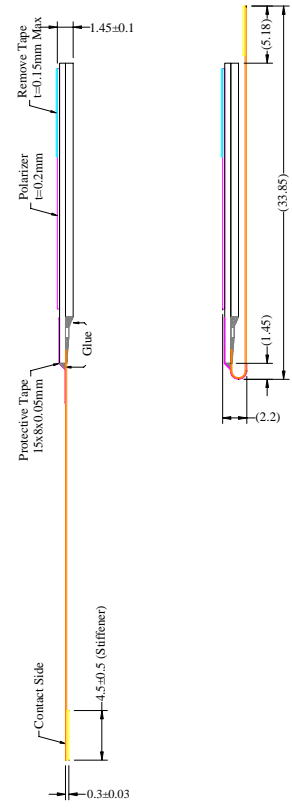


Item	Date	Remark
A	20110601	Original Drawing

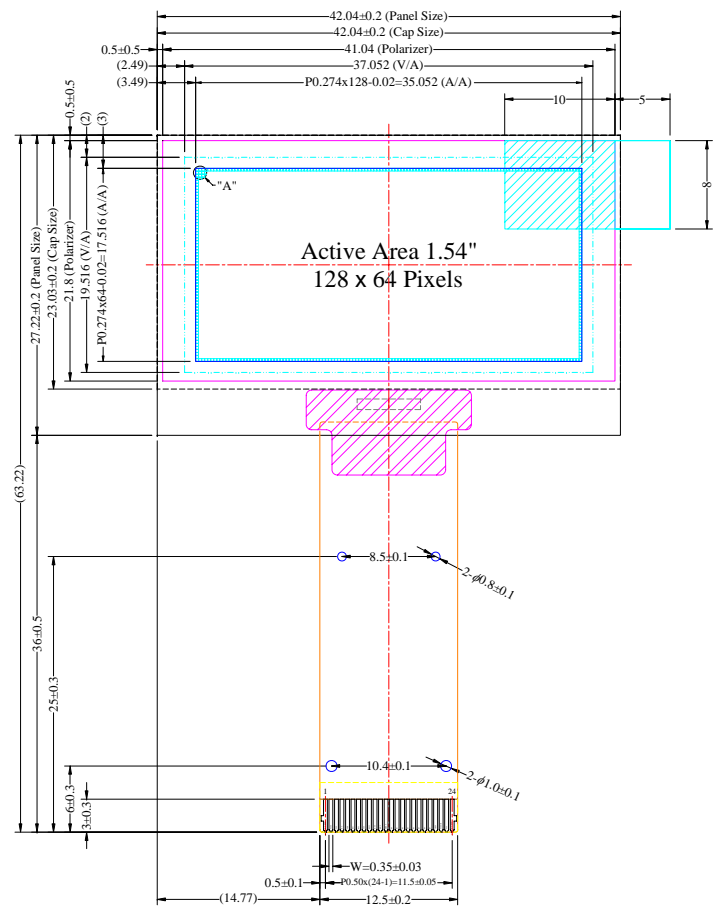

Pin	Symbol
1	N.C. (GND)
2	VLSS
3	VSS
4	N.C.
5	VDD
6	BS1
7	BS2
8	CS#
9	RES#
10	D.C#
11	R/W#
12	E/RD#
13	D0
14	D1
15	D2
16	D3
17	D4
18	D5
19	D6
20	D7
21	BEF
22	VCOMH
23	VCC
24	N.C. (GND)

- Notes:
1. Color: Light Blue
 2. Driver IC: SSD1309
 3. FPC Number: UT-0205-P05
 4. Interface: 8-bit 68XX/80XX Parallel, 4-wire SPI, I2C
 5. General Tolerance: ±0.30
 6. The total thickness (1.55 Max) is without polarizer protective film & remove tape. The actual assembled total thickness with above materials should be 1.80 Max.

Customer Approval Signature	WiseChip Semiconductor Inc.						Drawing Number	Rev.	
	UG-2864KLBMG01 Folding Type OEL Display Module Pixel Number: 128 x 64, Monochrome, COG Package						DMX2864CNGF95	A	
Unless Otherwise Specified		Title	Material				Soda Lime / Polyimide		
Unit	mm								
General Roughness		Tolerance	Drawn	E.E.	Panel / E.	P.M.	Scale Sheet Size		
Dimension	±0.3								
Angle	±1	Date	20110601	20110601	20110601	20110601			