

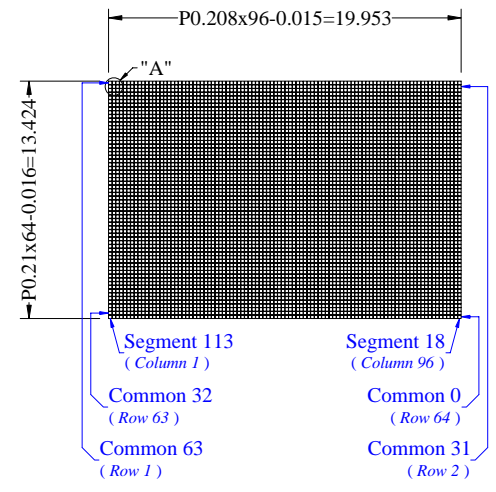
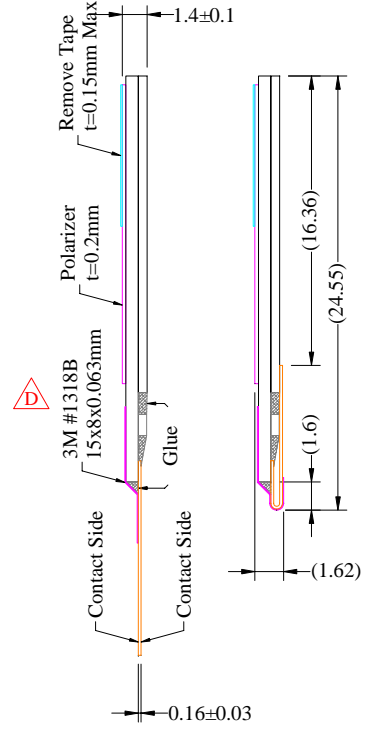


Item	Date	Remark
A	20060804	Original Drawing
B	20060810	Modify Pixel Size
C	20060828	Modify FPC Alignment Mark & FPC Number Modify IC Protective Film Size
D	20071225	Update FPC Number & Revise Pin Definition

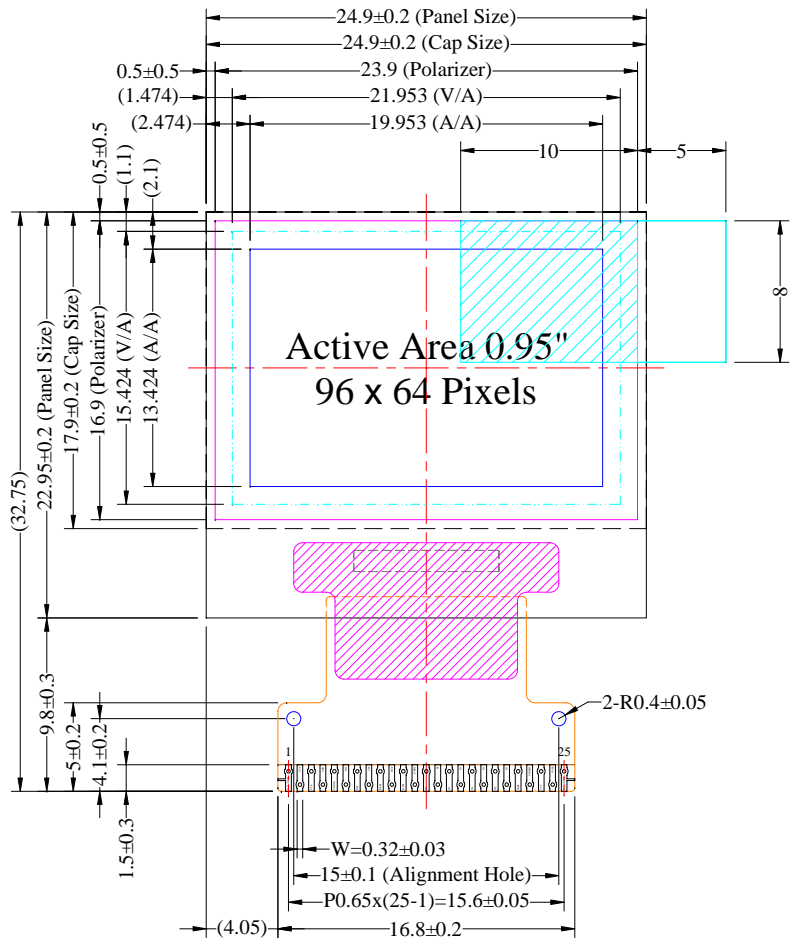

Pin	Symbol
1	N.C. (GND)
2	VCC
3	VSS
4	VDD
5	VDDIO
6	BS1
7	BS2
8	CS#
9	RES#
10	D/C#
11	R/W#
12	E/RD#
13	D0
14	D1
15	D2
16	D3
17	D4
18	D5
19	D6
20	D7
21	IREF
22	VCOMH
23	VCC
24	VLSS
25	N.C. (GND)

- Notes:
- Color: White
 - Driver IC: SSD1305
 - FPC Number: UT-0205-P02 / UT-0205-P04 △
 - Interface: 8-bit 68XX/80XX Parallel, 4-wire SPI, I2C
 - General Tolerance: ±0.30
 - The total thickness (1.50 Max) is without polarizer protective film & remove tape. The actual assembled total thickness with above materials should be 1.75 Max.

Customer Approval Signature		Univision Technology Inc.						Drawing Number		Rev.			
		Unit		Title	Drawn		E.E.		Panel / E.		P.M.		
		Unless Otherwise Specified			UG-9664HSWAG01 Folding Type OEL Display Module Pixel Number: 96 x 64, Monochrome, COG Package	Humphrey Lin		James Wang		Ivy Lo		Sean Lin	
		General Roughness		Date		Date		Date		Date			
		Tolerance		By		E.E.		Panel / E.		P.M.			
		Dimension		Date		Date		Date		Date			
		Angle		Date		Date		Date		Date			
								Material					
								Soda Lime / Polyimide					
								Scale		Sheet		Size	
								1:1		1 of 1		A3	