

SIGN	DATE	DESCRIPTION	APPROVER
△			

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!

Materials




- Item a Terminal body: Thermoplastic (UL 94V-0)
- Item b Terminal screw: Steel Zinc plating "-" slot type
- Item c Clamp: Zinc alloy . Ni plated
- Item d Long wire guard solder pin: Brass .Tin plated
- Item e Center wire guard solder pin: Brass .Tin plated
- Item f Short Wire guard solder pin: Brass .Tin plated

Electrical cULus

- Voltage rating: 600VAC
- Current rating: 20A
- Wire range:
- Solid wire(AWG): 12-30
- Stranded wire(AWG): 12-30
- Torque(Lb-In): 4.3
- Screw: M3
- Wire strip length: 7-8mm
- Withstanding Voltage: 2.2KV
- Operating temperature: -40°C to +115°C
- Soldering temperature: 250°C±5°C/5 Sec
- Safety Approval:
- Critical dimension: ▽

K7 03 0 3 x 0 xxxx G

- G: Pb<40000ppm
- COLOR
- 0 Black (RAL9005)
 - 1 Red (RAL3001/D)
 - 2 Red (RAL3001/D)
 - 3 Orange(RAL2011/P)
 - 4 Yellow(RAL1018/A)
 - 5 Green(RAL6018/T)
 - 6 Blue (RAL5015/A)
 - 7 Grey(RAL7035/D)
 - 8 Grey(RAL7035/D)
- 0000: "@" Logo (Standard)
000A: "ANYTEK" Mark
Any special item by customer request. please contact sales department.

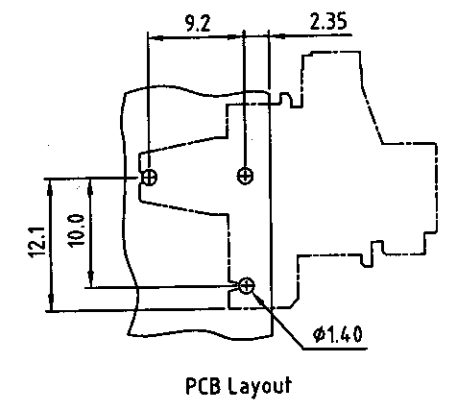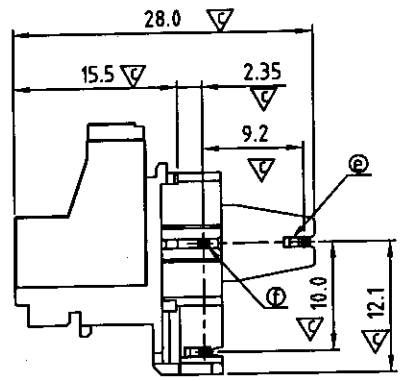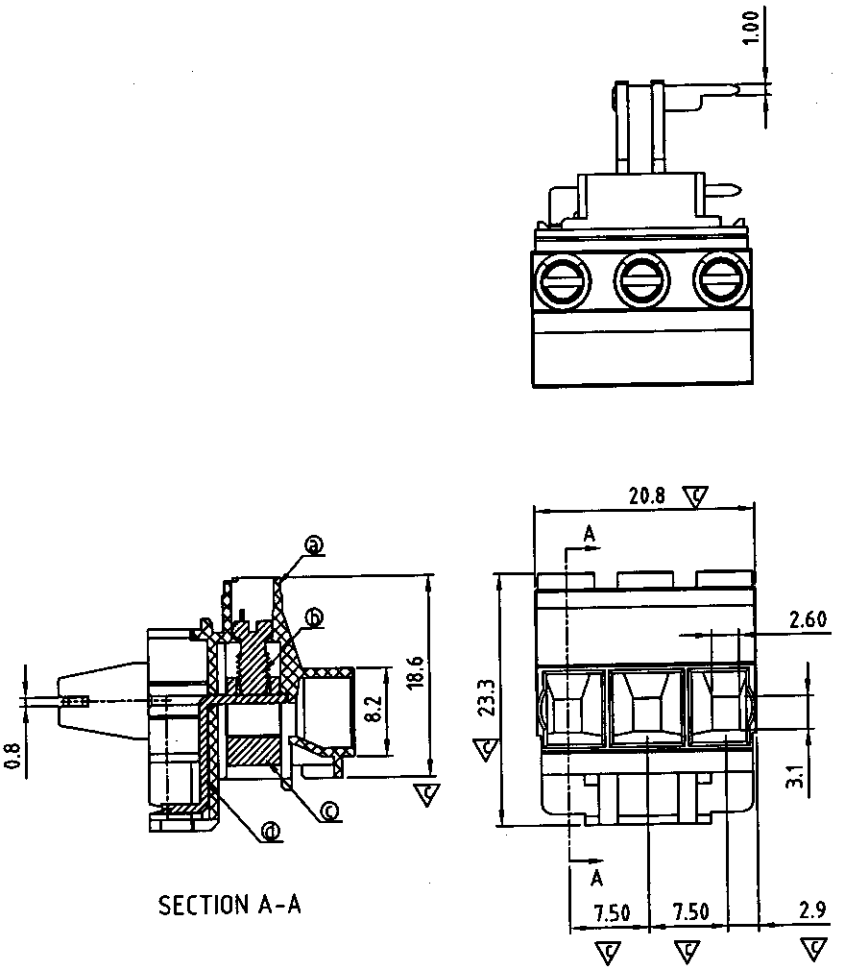

ANYTEK		CUSTOMER COPY	
ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THRD PARTIES IN ANY FORM WHATSOEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD			
TITLE	K7 7.5 SERIES 3P (Right)		
PART NO.	K70303x0xxxxG	DWG NO.	8K70001
APPROVED	CHECKED	DESIGNED	DRAWN
		Runner	Runner
		2010.11.09	2010.11.09
SHEET: 01/01		REV: B	
Tolerance		UNIT: mm	
X. ±0.5		SCALE: NONE	
X.X ±0.3		X.XX ±0.1	
X* ±1*			