



TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,
Taoyuan, 324, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532

E-mail: ttsales@mail.taisaw.com Web: www.taisaw.com

Approval Sheet For Product Specification

Issued Date:

Product Name: SAW Resonator 840 MHz SMD 3.8X3.8 mm

TST Parts No.: TC0327A

Customer Parts No.: _____

Company: _____

Division: _____

Approved by : _____

Date: _____

Checked by: _____ Asin Lin

Approval by: _____ Francis Chen

Date: _____ 2006/07/18



TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,
Taoyuan, 324, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532

E-mail: tstsales@mail.taisaw.com Web: www.taisaw.com

SAW Resonator 840 MHz

MODEL NO.: TC0327A

REV. NO.:1

A. FEATURES:

1. 1-Port Resonator.

B. MAXIMUM RATING:

1. Input Power Level: 0 dBm
2. DC voltage: 12 V
3. Operating Temperature: -40°C to +85°C
4. Storage Temperature: -40°C to +85°C


C. ELECTRICAL CHARACTERISTICS:

Characteristic	Units	Minimum	Typical	Maximum
Center frequency Fr	MHz	839.875	840	840.125
Insertion Loss IL	dB		1.3	2.0
Unloaded Quality factor		-	8000	-
Equivalent Elements				
Motional capacitance C1	fF	-	1.36	-
Motional inductance L1	μH	-	26.2	-
Motional resistance R1	Ohm	-	17	-
Parallel capacitance Co	pF	-	2.46	-
Temp.coeff.	ppm/c*2	-	0.032	-
Turnover To	deg.C	-	25	-
Package size		SMD 3.8X3.8X1.4mm		


RoHS Compliant
Lead free
Lead-free soldering

D. EQUIVIRENT CIRCUIT:

One-Port Resonator:

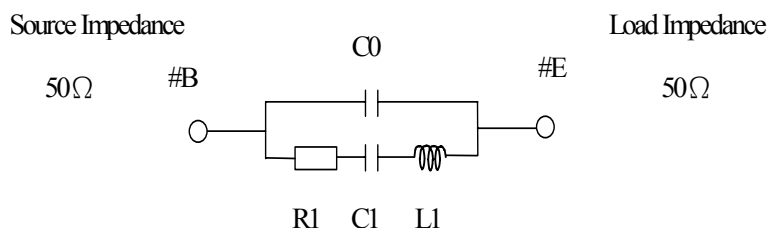

E. FREQUENCY CHARACTERISTICS:

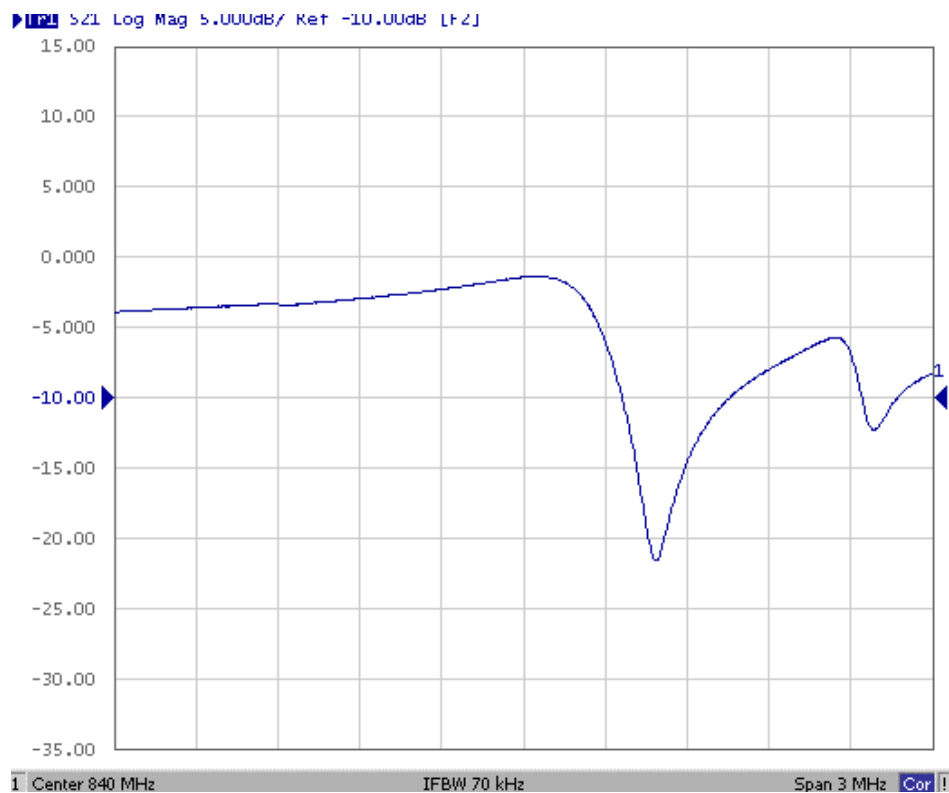


F. TEST CIRCUIT:

Network analyzer

From 50Ω
Network
Analyzer

50Ω B




A、C、D、F

E 50Ω

To 50Ω
Network
Analyzer

G. OUTLINE DRAWING:

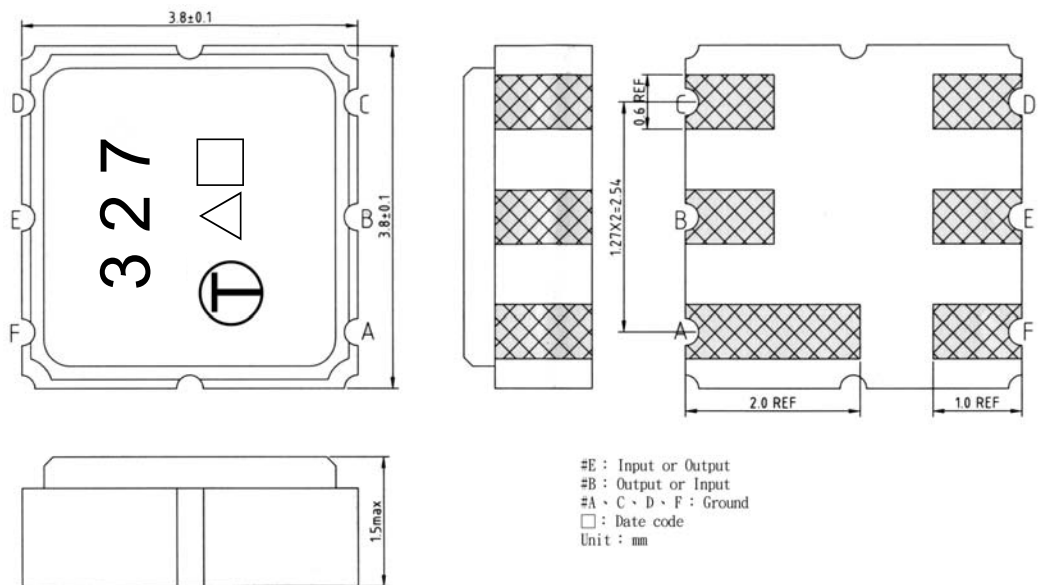


□ Date code: Provided by planer each year

△ Product Year Code


Year	2005	2006
	2007	2008
	.	.
Product Code	C	c

H. PCB FOOTPRINT:

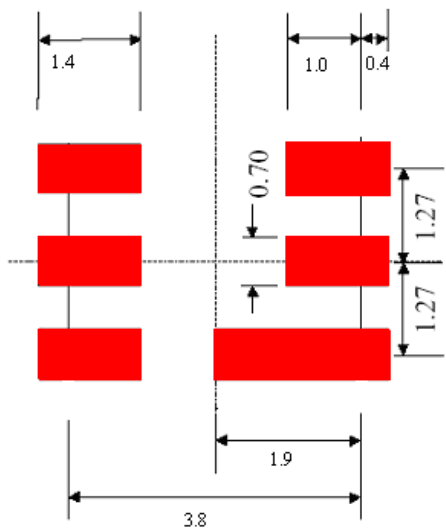


I. PACKING:

1. REEL DIMENSION

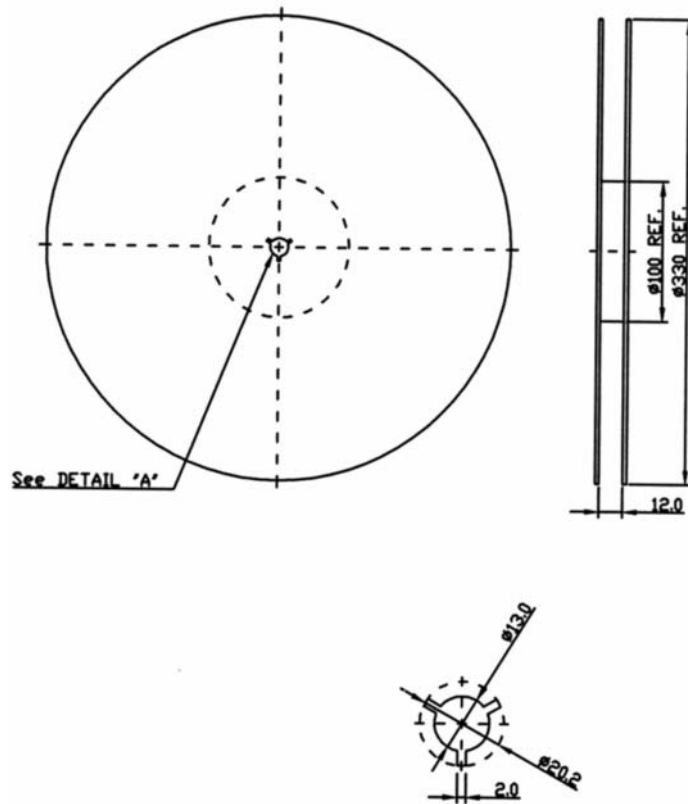

2. TAPE DIMENSION

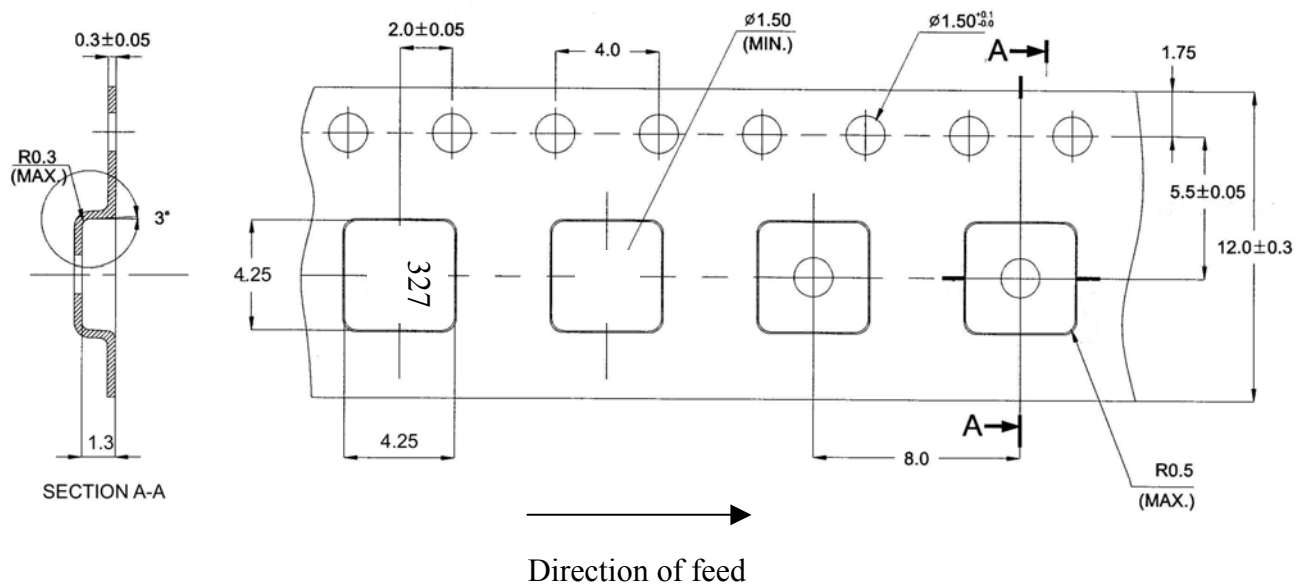

J. REFLOW PROFILE

