

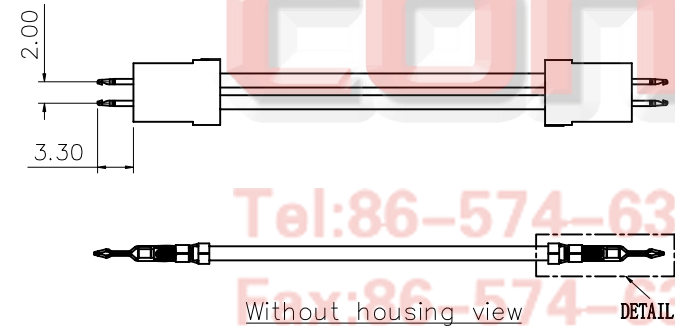
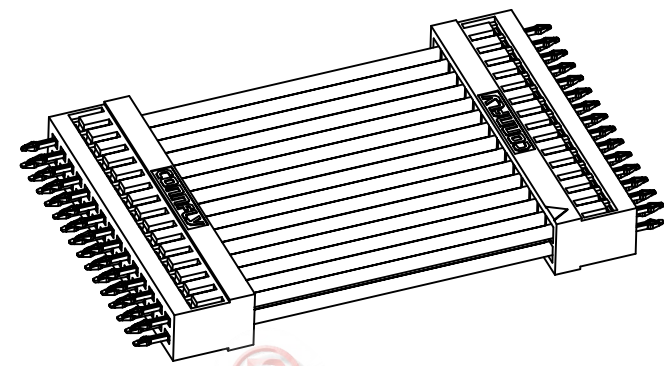


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	Andy_H 01/20/16'		LJC 01/20/16'

N=ALL POSITIONS/2

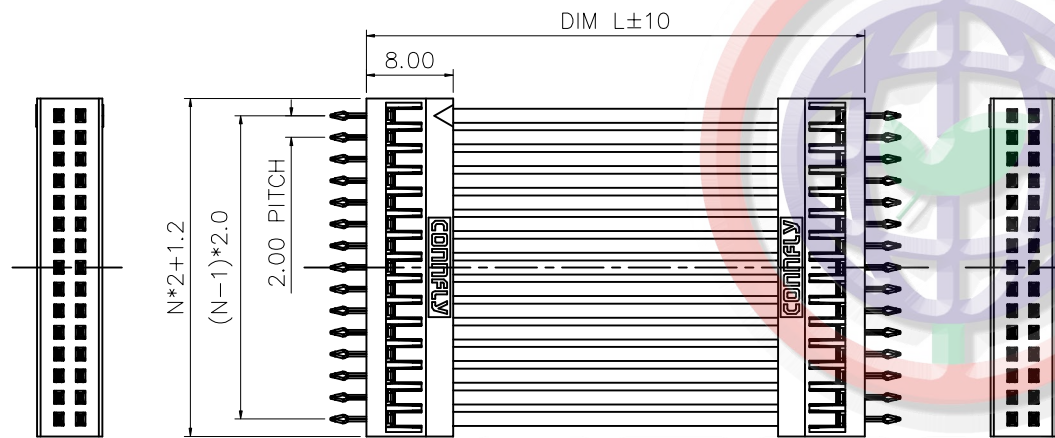

Number Code:


DS1067-02-X X X X X

- Wire Length(DIM L):
080: 80mm
150: 150mm
- Contact Plating:
6: Full Tin ; 8: Full Gold
- Housing Color:
W: White
- Wire Gauge:
26: AWG 26#; 24: AWG 24#
- Mounting type:
C: Crimp
W: Crimp+Soldering
- No. of contacts:
2*2-2*20

NOTES:

1. MAIN SPECIFICATIONS

- . Housing material: NYLON 66
- . Contact: Copper Alloy
- . Wire range: AWG#26(2468)
- . Rated voltage: 250V
- . Rated current: 1A
- . Contact resistance: ≤ 100mΩ
- . Insulation resistance: ≥ 1000MΩ
- . Withstanding voltage: 500V, AC 1 minute
- . Temperature range: -20 ~ +80°C

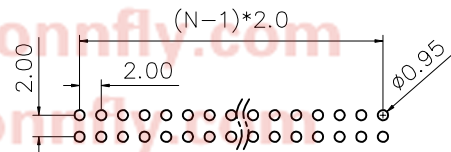

RECOMMENDED PCB LAYOUT
(TOLERANCE=±0.05)

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION	TITLE	2.0mm SAN+SAN TYPE CABLE WITH CRIMP+SOLDERING	
X.	±0.60	X.	±3°	mm			
.X	±0.38	.X	±2°	SHEET SIZE	A4	SERIES	DS1067-02 SERIES
.XX	±0.25	.XX	±1°	DRAWING TYPE CUSTOMER			
SCALE		SHEET		CUSTOMER			
1:1		1 OF 1					
DRAWING NO.		C-DS1067-02-XXXXXX-A					

Tel: 86-574-63508787
 Fax: 86-574-63510817
 E-mail: sale@connely.com
 http://www.connely.com
 Add: East Industry Zone KuangYan
 Town Cixi Ningbo China
 P.C: 315333