


RoHS

IP66-68

REV.	DESCRIPTION	DATE
A	ISSUE	Apr/20/2015

Ref.

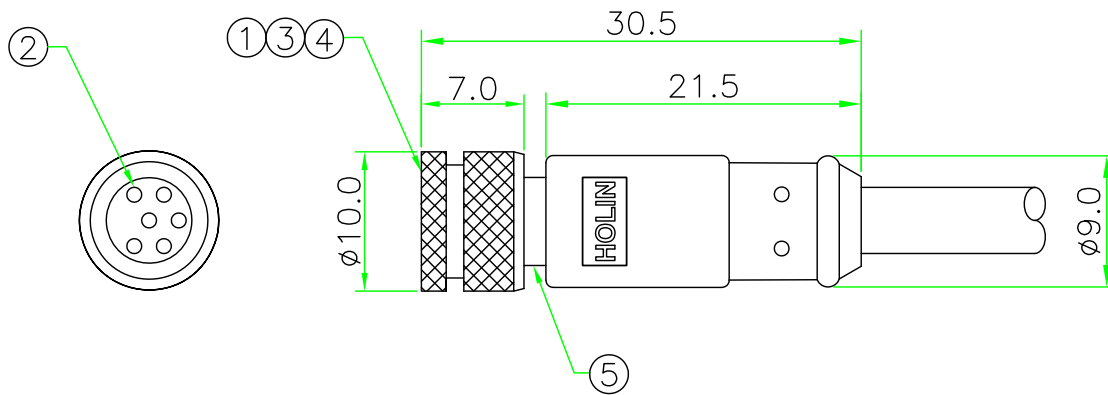

NOTES:

1. ELECTRICAL CHARACTERISTICS:

CURRENT RATING: 1.5A / 3A

TEMPERATURE RANGE: -20°C TO +80°C

DIELECTRIC WITHSTANDING VOLTAGE:

500V AC FOR ONE MINUTE

2. HOW TO ORDER: A08x-S2xxSN

02 - 2 PINS 05 - 5 PINS


03 - 3 PINS 06 - 6 PINS

04 - 4 PINS

I - CURRENT RATING 1.5A

D - CURRENT RATING 3A

*Cable specification and length can be customized.

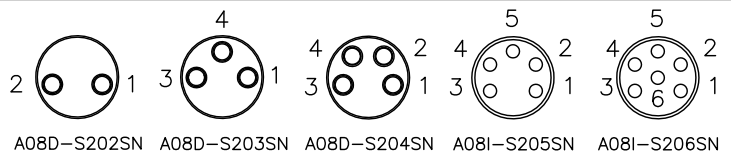

PIN ASSIGNMENT FRONT VIEW
(前視圖)

5	METAL SHELL	BRASS, Nickel Plated.		1	
4	RING NUT	BRASS, Nickel Plated.		1	
3	O-RING	VITON	BLACK	1	
2	CONTACT	BRASS , 6 u" Gold plated .Female Contact.		N	
1	CONNECTOR	M8 A-Coding Female Connector Insert.NYLON+GF.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

HOLIN® HTP ASIA TECHNOLOGY CO., LTD. 禾凌科技股份有限公司			
	UNIT: mm	TITLE : M8 A-Coding Female Shielded Molded Cable Ass'y	
SCALE	2:1	P/N: A08x-S2xxSN	DR. Patty
UNLESS OTHERWISE SPECIFIED TOLERANCES: .X ± 0.25 .XX ± 0.1 .XXX ± 0.05 ANGLE ± 1°			CH. ERIC
REV. A	SHEET 1/1	DWG.NO: A08x-S2xxSN	AP.