

DIMENSION

Dim A	$(N-1) \times 5.08 + 4.1$
Dim B	$(N-1) \times 5.08$
Dim L	$N \times 5.08$

N = Number of poles

2p-6p	$\pm 0.15$
7p-12p	$\pm 0.25$
13p-16p	$\pm 0.35$
17p-24p	$\pm 0.40$

SIGN	DATE	DESCRIPTION	APPROVER
△	9/20`14	add the safety certification icon	Evan
△			



THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!

Material

- ItemⒶ Female contact: PhBz ,Tin plated
- ItemⒷ Terminal (Bottom Body): Thermoplastic (UL94V-0)
- ItemⒸ Terminal (TOP Body): Thermoplastic (UL94V-0)


Electrical cULus

- Voltage rating: 300VAC
- Current rating: 5A
- Wire range:
- Solid wire(AWG): 18-24
- Stranded wire(AWG): 18-24
- Withstanding Voltage: 1.6KV
- Operating temperature: -40°C to +115°C
- △ ● Safety Approval: us
- Critical dimension: ∇

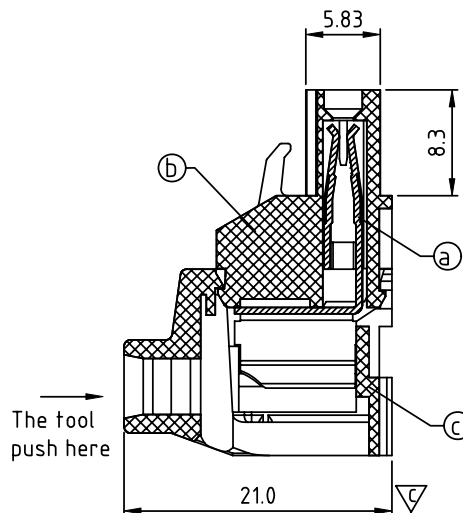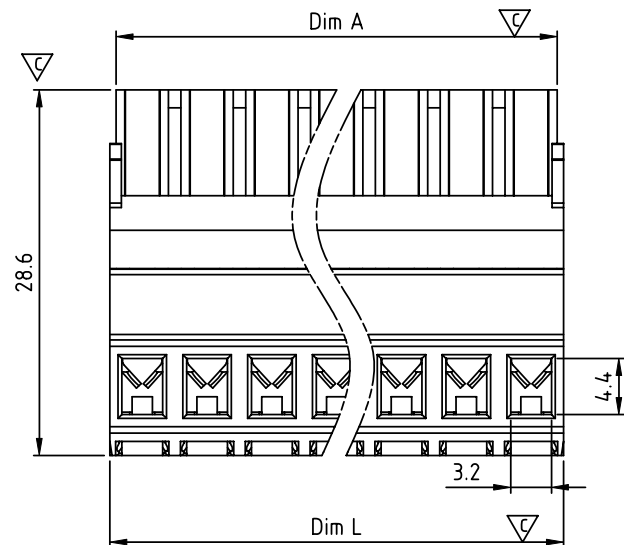

The tool push here

NT xx 50 x 0 xxxx G		G RoHS compliant (lead<4%) In copper Alloy
No. OF POLES		0000 "Ⓞ" Logo
02: 2 POLES		000A "ANY" Logo
		Any special item by customer request, please contact sales department
24: 24 POLES	COLOR	
	0 Black (RAL9005)	
	2 Red (RAL3001/D)	
	3 Orange(RAL2011/P)	
	4 Yellow(RAL1018/A)	
	5 Green(RAL6018/T)	
	6 Blue (RAL5015/A)	
	8 Grey(RAL7035/D)	
	9 White(RAL1102)	
	C Green(RAL6018/U)	

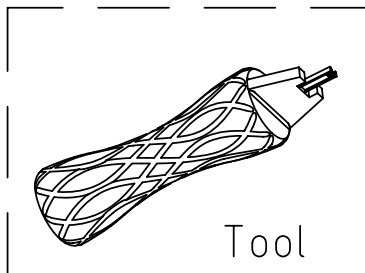

<b>ANYTEK</b>				<b>CUSTOMER COPY</b>			
ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATSOEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD							
TITLE	NT 5.08mm Series 2P-24P						
PART NO.	NTxx50x0xxxxG			DWG NO.	8NT0001		
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.		Tolerance	
		Evan 09/20`14	Evan 09/20`14			X.	$\pm 0.50$
						UNIT:	mm
						SCALE:	NONE
SHEET: 01/01						REV.:	C
						X.X	$\pm 0.30$
						X.XX	$\pm 0.10$
						X°	$\pm 1°$