


IP66-68

RoHS

REV.	DESCRIPTION	DATE
A	ISSUE	July/01/2008
A1	Add 7-8 Pin & correct Pin Assignment.	Oct/16/2018

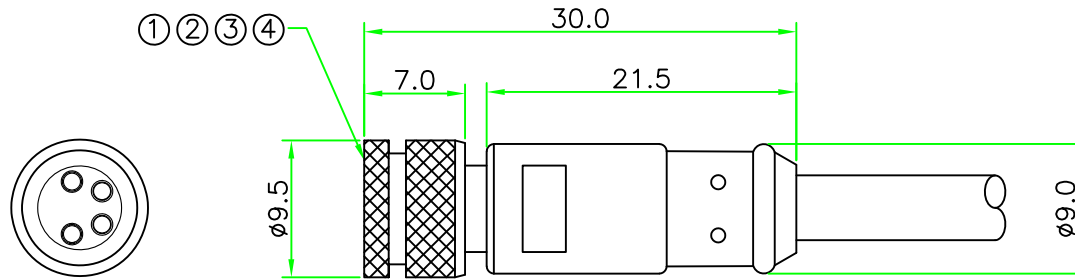

NOTES:



1. ELECTRICAL CHARACTERISTICS:

CURRENT RATING: 1.5A / 3A

TEMPERATURE RANGE: -25°C TO +85°C

DIELECTRIC WITHSTANDING VOLTAGE:


500V AC FOR ONE MINUTE

2. HOW TO ORDER: A08x-M2xxSN

- 02 - 2 PINS
- 03 - 3 PINS
- 04 - 4 PINS
- 05 - 5 PINS
- 06 - 6 PINS
- 07 - 7 PINS
- 08 - 8 PINS

I - CURRENT RATING 1.5A
D - CURRENT RATING 3A

*Cable specification and length can be customized.

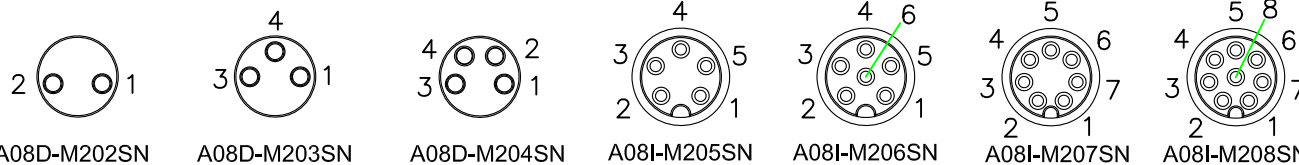

PIN ASSIGNMENT FRONT VIEW (前視圖)

No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS
4	Ring Nut	Brass, nickel plated with ratchet mechanism, without sleeve		1	
3	O-Ring	Viton	BLACK	1	
2	Contact	Brass, 6 u" gold plated. Female contact.		N	
1	Connector	M8 A Coding Female connector insert. Nylon+GF.	BLACK	1	

HOLIN® HTP ASIA TECHNOLOGY CO., LTD.
禾凌科技股份有限公司

	UNIT: mm	TITLE :	M8 A Code
SCALE	2:1		Female molded cable Ass'y
UNLESS OTHERWISE SPECIFIED TOLERANCES:		P/N:	A08x-M2xxSN
.x ± 0.5	.xx ± 0.25		
.xxx ± 0.1	ANGLE ± 1°		
REV.	SHEET	DWG.NO:	A08x-M2xxSN
A1	1/1		

DR. SIBYL


CH. ERIC

AP.

IP66-68

RoHS

REV.	DESCRIPTION	DATE
A	ISSUE	Mar/05/2014

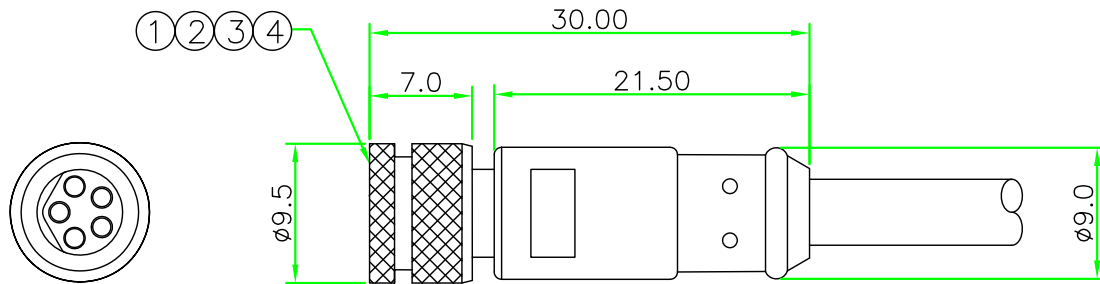


NOTES:

1. ELECTRICAL CHARACTERISTICS:

CURRENT RATING: < 4A

TEMPERATURE RANGE: -25°C TO +85°C

DIELECTRIC WITHSTANDING VOLTAGE:
500V AC FOR ONE MINUTE



PIN ASSIGNMENT FRONT VIEW

正視圖

*Cable specification and length can be customized.

HOLIN® HTP ASIA TECHNOLOGY CO., LTD.
禾凌科技股份有限公司

4	RING NUT	BRASS, nickel plated with ratchet mechanism,without sleeve		1		UNIT:mm SCALE 2:1	TITLE : M8 B Code Female molded cable Ass'y	
3	O-RING	VITON	BLACK	1				
2	Contact	BRASS , 6 u" Gold plated .Female Contact.		5		UNLESS OTHERWISE SPECIED TOLERANCES: X ± 0.25 XX ± 0.1 XXX ± 0.05 ANGLE ± 1°X REV. SHEET	P/N: B08D-M205SN DR. Patty CH. ERIC	
1	Connector	M8 Female connector insert.	BLACK	1				
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS	A	1/1	DWG.NO: B08D-M205SN AP.