

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 01/12/15'		

NOTES:

1. Materials:

- 1.1 Housing material: NYLON 66
- 1.2 Contact: Copper Alloy
- 1.3 Wire Insulator: PVC
- 1.4 Wire: Tin Plated Copper

2. Specifications:

- 2.1 Current Rating:1.5A
- 2.2 Voltage Rating:250V AC/DC
- 2.3 Contact Resistance: 20mΩ Max.(Connector Only)
- 2.4 Insulation resistance: 1000MΩ Min.(Connector Only)
- 2.5 Wire Range:AWG#22~26




3. Packing Type:PE Bag+Inner Box+Ouler Box

4. Product Number Code:

DS1070-04 - X X X X X X X

- WIRE LENGTH(DIM L)  
080: 80mm  
180: 180mm
- HOUSING COLOR  
W: White
- CONTACT PLATING  
6: Full Tin  
8: Full Gold
- MOUNTING TYPE  
C: Crimp
- WIRE GAUGE  
26: AWG #26 24: AWG #24  
22: AWG #22
- CONNECTOR TYPE  
F: Female
- No.OF CONTACTS  
2~20

N=No.OF CONTACTS

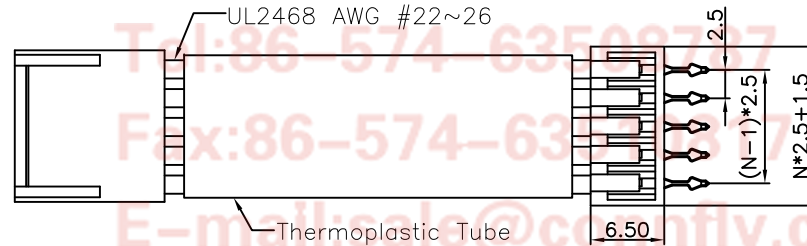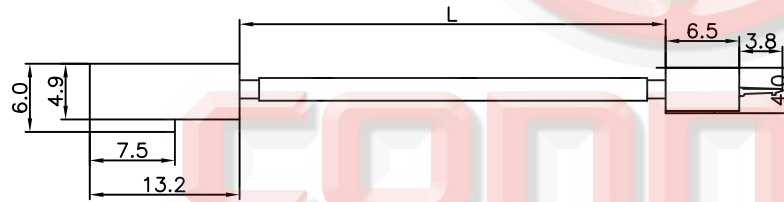

Tel:86-574-6350277  
 Fax:86-574-6350337  
 E-mail:sales@connfly.com  
 http://www.connfly.com  
 Add:East Industry Zone KuangYan  
 Town Cixi Ningbo China  
 P.C:315333

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°

PROJECTION	TITLE
	2.54mm 2510+SCN TYPE
UNITS	WITH UL2468 WIRE & THERMOPLATIC TUBE
SHEET SIZE	SHEET
A4	DS1070-04 SERIES

DRAWING TYPE	CUSTOMER		
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	C-DS1070-04-XXXXXXX-A		

晨翔电子有限公司  
 CONNFLY CONNFLY ELECTRONIC CO., LTD