

The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use of this information in any format or manner. CONNELY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.

1 2 3 4 5 6 7 8

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 12/01/17'		

NOTES:

1. SPECIFICATIONS




- . Contact Rating: 100mA at 30Vdc
- . Insulation Resistance: 100MΩ min.
- . Contact Resistance: 100mΩ max.
- . Dielectric Withstanding Voltage: 250V AC(rms) for 1 minute.
- . Operating Life: 10,000 cycles
- . Travel: 1.5±0.3mm
- . Operation Temperature Range: -25°C to +70°C

- . Wave Soldering: Recommended Solder Temperature At 500°f(260°C)max. 5 Seconds
- . Hand Soldering: Use Soldering Iron Of 30 Watts, Controlled At 608°f(320°C) Approximately 2 Seconds.

2. PRODUCT NUMBER CODE:

DS1041-15 - X X X X X X X X

- Polar Support
X: W/O Polar Type
- Operating Life
1: 10,000 cycles
- Lock Support
S: W/ Lock Type
- Operating force
200: 200gf
- Packing type
A: polybag
- Actuator color
L: Blue
- Housing color
K: Black
- Profile Height
095: 9.5mm
- No. of contacts
6: 6 pos

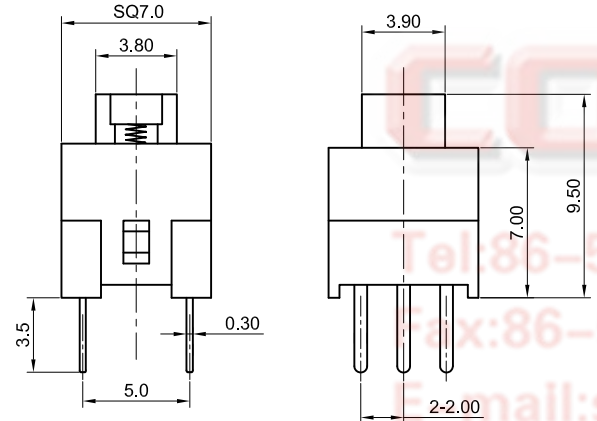

Tel: 86-574-63508787
 Fax: 86-574-63510817
 Email: sale@connfly.com
 http://www.connfly.com
 Add: East Industry Zone KuangYan
 Town Cixi Ningbo China
 P.C: 315333

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	7.0*7.0*9.5mm Tact Switch V/T 6 Positions W/ Lock & W/O Polar Type				
X.	±0.60	X.	±5°	UNITS	mm	SERIES	DS1041-15 SERIES				
.X	±0.38	.X	±3°	SHEET SIZE	A4						
.XX	±0.25	.XX	±2°								
DRAWING TYPE		CUSTOMER			晨翔电子有限公司 CONNFLY CONNELY ELECTRONIC CO. LTD						
SCALE		1:1	SHEET							1 OF 1	
DRAWING NO.		C-DS1041-15-XXXXXXXXXX-A									

1 2 3 4 5 6 7 8