
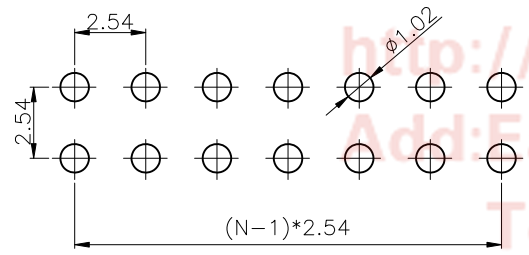
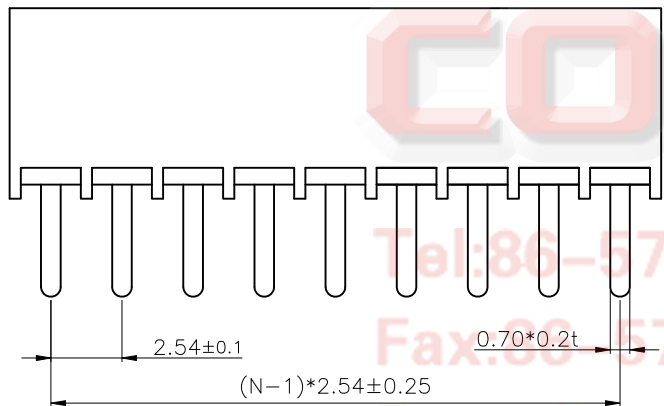


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	ych 01/24/08'	~	LJC 01/24/08'
B	DRAWING UPDATE	JLZ 09/08/17'	~	

N:NUMBER OF CONTACTS/2

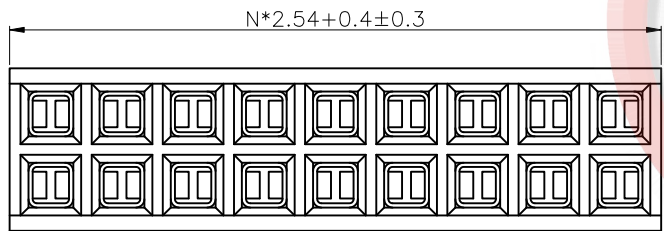

RECOMMEND PCB LAYOUT  
(TOLERANCE=±0.05)

NOTES:

- MATERIAL
  - INSULATOR MATERIAL: THERMOPLASTIC(UL 94V-0).
  - CONTACT MATERIAL: COPPER ALLOY.
- SPECIFICATION
  - TEMPERATURE: -40°C~+105°C.
  - DIELECTRIC WITHSTANDING VOLTAGE: AC 600V AC.
  - INSULATION RESISTANCE: 1000MΩ min.
  - CONTACT RESISTANCE: 20mΩ max.
  - CURRENT RATING: 3A.

3. PART NUMBER: DS1023-07

4. PRODUCT NUMBER CODE:

DS1023-07 - X X X

- CONTACT PLATING  
8: Full glod flash
- MOUNTING TYPE  
V: V/T type
- No.of Contacts  
2\*2 - 2\*40

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°

DRAWING TYPE	CUSTOMER		
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	C-DS1023-07-XXX-B		

PROJECTION		TITLE	FEMALE HEADER PITCH
UNITS	mm		2.54mm V/T TYPE h=6.8mm
SHEET SIZE	A4	SERIES	DS1023-07 SERIES

晨翔电子有限公司  
**CONNFLY CONNFLY ELECTRONIC CO. LTD**

CONNFLY  
Tel: 86-574-63508787  
Fax: 86-574-63510817  
E-mail: sale@connfly.com  
http://www.connfly.com  
Add: East Industry Zone KuangYan  
Town Cixi Ningbo China  
C: 315333