
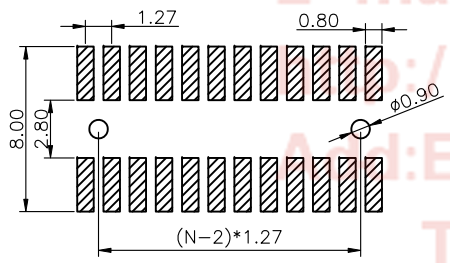
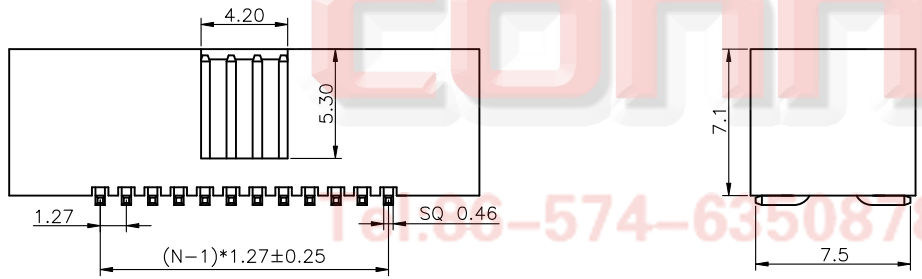


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 08/31/17'	~	

- NOTES:
- MATERIAL
    - INSULATOR:THERMOPLASTIC(UL 94V-0).
    - CONTACT MATERIAL:COPPER ALLOY.
  - SPECIFICATION
    - CURRENT RATING:1.0 Amp.
    - INSULATION RESISTANCE:1000MΩ Min.
    - DIELECTRIC WITHSTANDING:300VAC.
    - CONTACT RESISTANCE:20mΩ Max.
    - OPERATING TEMPERATURE:-40°C TO+105°C.
  - PRODUCT NUMBER CODE:

DS1064-05 - X X X X X X - X

- PLATING LEVEL  
3A: 3A LEVEL
- PACKING TYPE  
B: TUBE  
T: TRAY
- PICK UP SUPPORT  
S: W/ PICK UP  
X: W/O PICK UP
- HOUSING COLOR  
B:BLACK
- CONTACT PLATING  
8: FULL GOLD FLASH
- MOUNTING TYPE  
S: SMT TYPE
- No.OF CONTACTS  
06~40

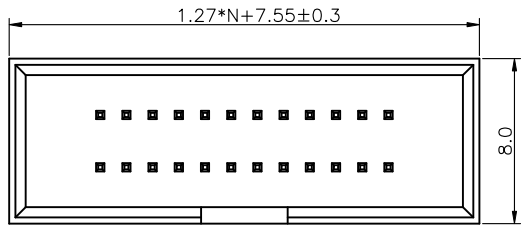


RECOMMEND PCB LAYOUT  
(TOLERANCE=±0.05)

**CONNFLY**

Tel:86-574-63508787  
 Fax:86-574-63510817  
 E-mail:sale@connfly.com  
 http://www.connfly.com  
 Add:East Industry Zone KuangYan  
 Town Cixi Ningbo China  
 P.C:315333

GENERAL TOLERANCE	ANGLE TOLERANCE	PROJECTION	TITLE
X. ±0.60	X. ±5°	mm	1.27*2.54mm Box Header
.X ±0.38	.X ±3°	A4	SMT Type H=7.1mm
.XX ±0.25	.XX ±2°	SHEET SIZE	SERIES DS1064-05 SERIES
DRAWING TYPE	CUSTOMER	SCALE 1:1 SHEET 1 OF 1	
DRAWING NO.	C-DS1064-05-XXXXX-X-A	DRAWING NO.	

 **晨翔电子有限公司**  
**CONNFLY CONNFLY ELECTRONIC CO. LTD**