



RAYSTAR

曜凌光電股份有限公司

Web: www.raystar-optronics.com E-mail: sales@raystar-optronics.com

RFC350X-AYH-DNN

SPECIFICATION

General Specifications

- Size: 3.5 inch
- Dot Matrix: 320 x RGB x 240(TFT) dots
- Module dimension: 76.84(W) x 63.84(H) x 3.27(D) mm
- Active area: 70.08 x 52.56 mm
- Dot pitch: 0.073 x 0.219 mm
- LCD type: TFT, Normally black, Transmissive
- View Direction: Wide View
- Driver IC: ST7272A or equivalent
- Interface : 24-bit RGB
- Aspect Ratio: 4:3
- Backlight Type: LED, Normally White
- Touch Panel: Without Touch Panel
- Surface: Glare

*Color tone slight changed by temperature and driving voltage.


Interface

1. LCM PIN Definition

Pin	Symbol	Function
1	LED-	Power for LED backlight cathode
2	LED-	Power for LED backlight cathode
3	LED+	Power for LED backlight anode
4	LED+	Power for LED backlight anode
5	NC(YU)	No connect
6	NC(XL)	No connect
7	NC(SPI_IIC_SEL)	No connect
8	/RESET	Hardware reset
9	NC(CS)	No connect
10	NC(SDA)	No connect
11	NC(SCL)	No connect
12	B0	Data bus
13	B1	Data bus
14	B2	Data bus
15	B3	Data bus
16	B4	Data bus
17	B5	Data bus
18	B6	Data bus
19	B7	Data bus
20	G0	Data bus
21	G1	Data bus
22	G2	Data bus
23	G3	Data bus
24	G4	Data bus
25	G5	Data bus
26	G6	Data bus
27	G7	Data bus
28	R0	Data bus
29	R1	Data bus

30	R2	Data bus
31	R3	Data bus
32	R4	Data bus
33	R5	Data bus
34	R6	Data bus
35	R7	Data bus
36	HSYNC	Horizontal sync signal, default is negative polarity.
37	VSYNC	Vertical sync signal, default is negative polarity.
38	DCLK	Dot-clock signal and oscillator source
39	NC(HDIR)	No connect
40	NC(VDIR)	No connect
41	VCC	Power Supply
42	VCC	Power Supply
43	NC(YD)	No connect
44	NC(XR)	No connect
45	NC(PARA_SERI)	No connect
46	NC(BIST_EN)	No connect
47	NC(ENPROG)	No connect
48	NC	No connect
49	NC	No connect
50	NC	No connect
51	NC(DISP)	No connect
52	DE	Data input enable. Display access is enabled when DE is "H".
53	GND	Ground
54	GND	Ground

5. Contour Drawing

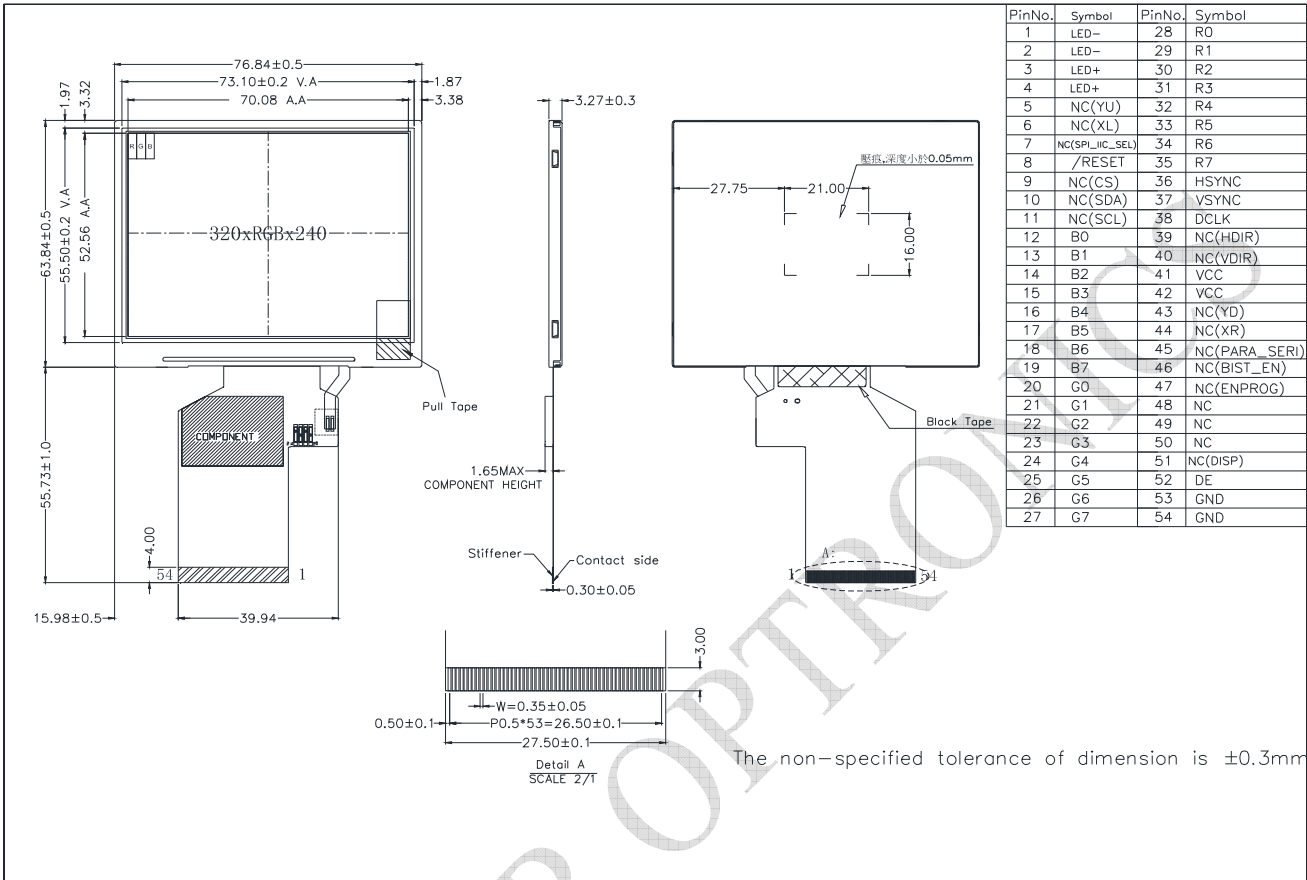

Absolute Maximum Ratings

Item	Symbol	Min	Typ	Max	Unit
Operating Temperature	TOP	-20	—	+70	°C
Storage Temperature	TST	-30	—	+80	°C

Electrical Characteristics

Operating conditions

Item	Symbol	Min	Typ	Max	Unit
Supply Voltage For LCM	VCC	3.0	3.3	4.2	V
Supply Current For LCM	ICC	—	20	30	mA