

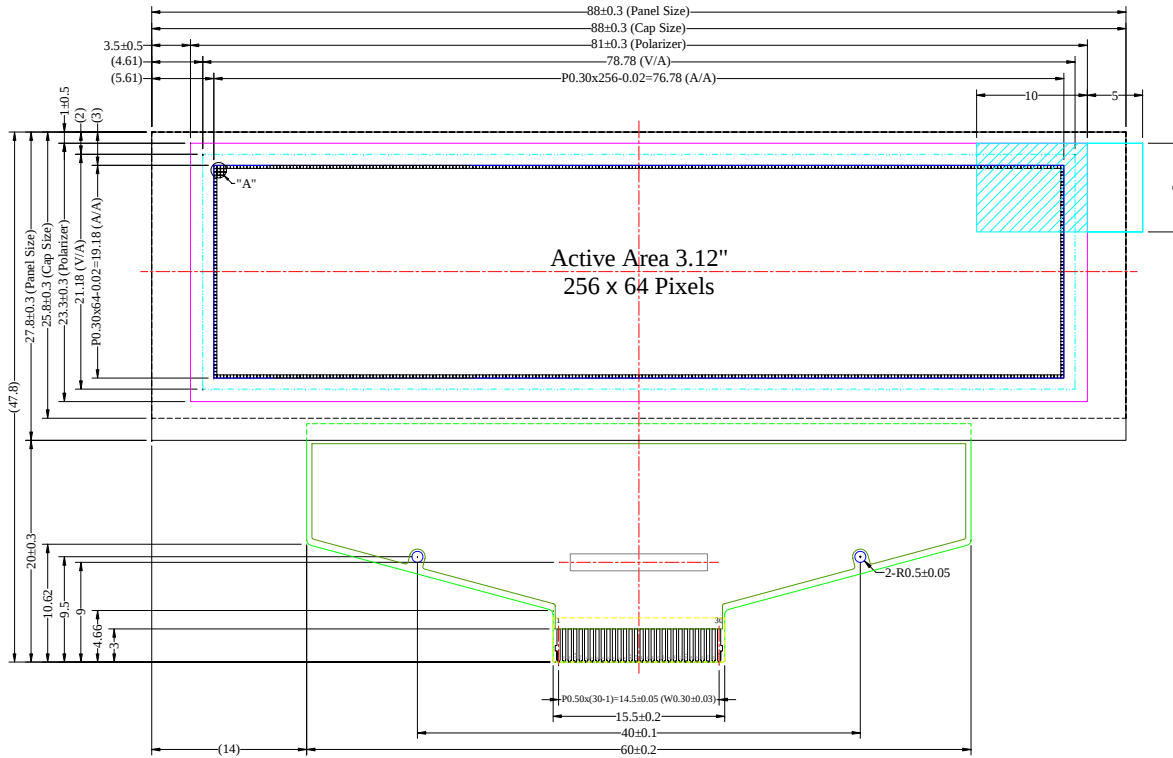
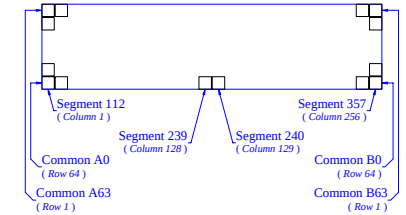




Notes:

- Color: White
- Driver IC: SSD1322
- Die Size: 12374um x 1526um
- COF Number: SSD1322U
- Interface:
8-bit 68XX/80XX Parallel, 3-/4-wire SPI
- General Tolerance: ±0.30
- The total thickness (2.10 Max) is without polarizer protective film & remove tape.
The actual assembled total thickness with above materials should be 2.35 Max.

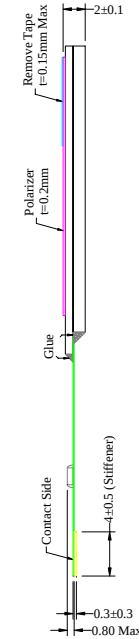

Pin	Symbol
1	N.C. (GND)
2	VSS
3	VCC
4	VCOMH
5	VLSS
6	D7
7	D6
8	D5
9	D4
10	D3
11	D2
12	D1
13	D0
14	E/RD#
15	R/W#
16	BS0
17	BS1
18	DC#
19	CS#
20	RES#
21	FR
22	IREF
23	N.C.
24	VDDIO
25	VDD
26	VCI
27	VSL
28	VLSS
29	VCC
30	N.C. (GND)

Customer Approval Signature		Univision Technology Inc.						Drawing Number		Rev.	
								DMG5664CNCF21		A	
		Unless Otherwise Specified		Title	UG-5664ASWEF01 Folding Type OEL Display Module Pixel Number: 256 x 64, Monochrome, COF Package				Material		
Unit		mm							Soda Lime / Polyimide		
General Roughness											
Tolerance											
Dimension		±0.30		By	Humphrey Lin	Ting-Kuo Hu	Ivy Lo	Cherry Lin	Scale	Sheet	Size
Angle		±1		Date	20080825	20080825	20080825	20080825	1:1	1 of 1	A3