

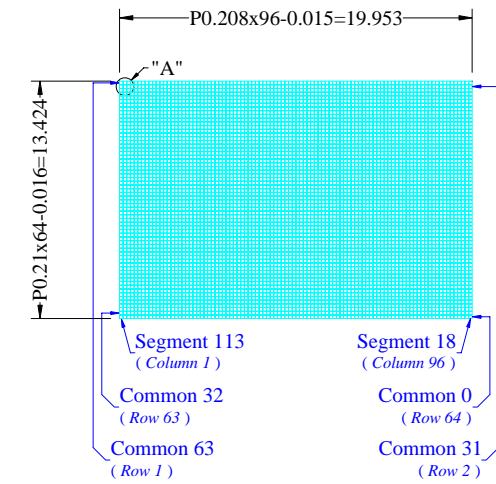
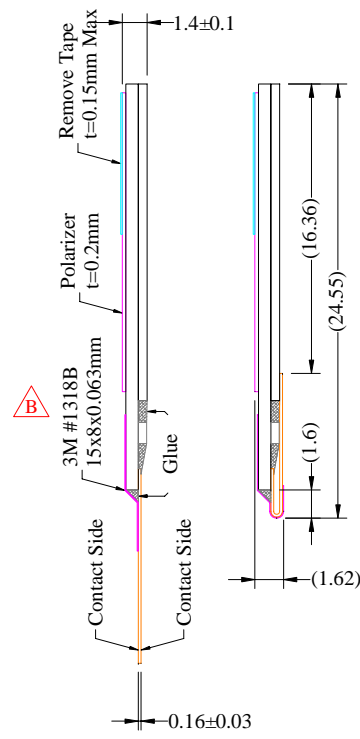


Item	Date	Remark
A	20061031	Original Drawing
B	20071225	Modify IC Protective Film Size Update FPC Number & Revise Pin Definition

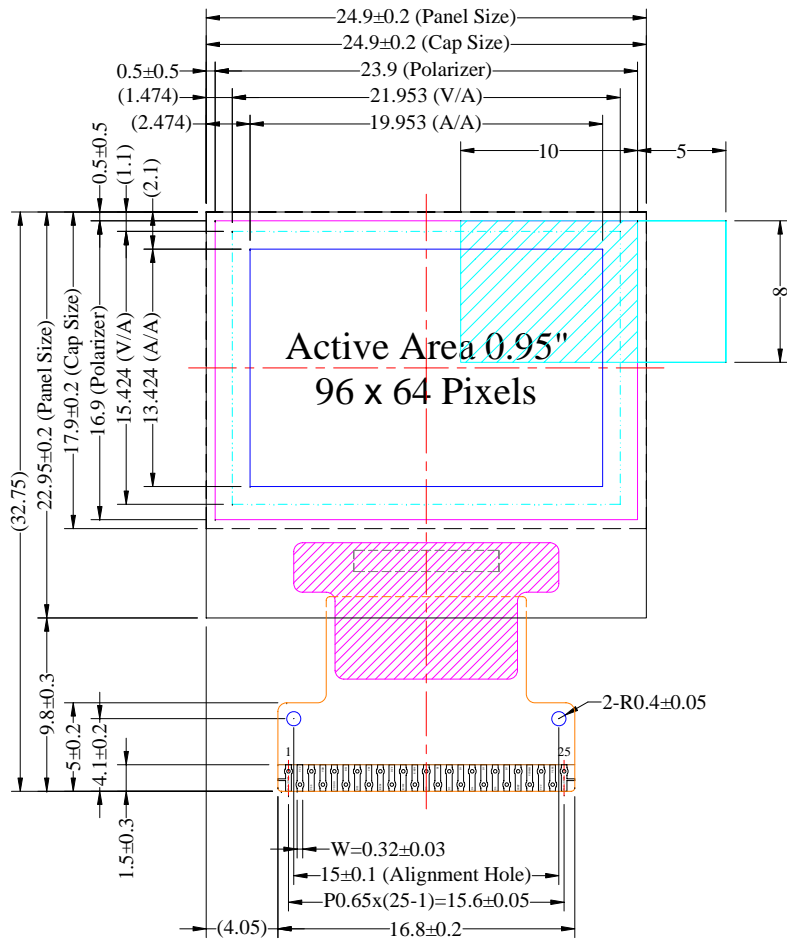

Pin	Symbol
1	N.C. (GND)
2	VCC
3	VSS
4	VDD
5	VDDIO
6	BS1
7	BS2
8	CS#
9	RES#
10	D/C#
11	R/W#
12	E/RD#
13	D0
14	D1
15	D2
16	D3
17	D4
18	D5
19	D6
20	D7
21	IREF
22	VCOMH
23	VCC
24	VLSS
25	N.C. (GND)

- Notes:
- Color: Light Blue
  - Driver IC: SSD1305
  - FPC Number: UT-0205-P02 / UT-0205-P04
  - Interface: 8-bit 68XX/80XX Parallel, 4-wire SPI, I2C
  - General Tolerance: ±0.30
  - The total thickness (1.50 Max) is without polarizer protective film & remove tape. The actual assembled total thickness with above materials should be 1.75 Max.

Customer Approval Signature		Univision Technology Inc.						Drawing Number	Rev.	
		UG-9664HLBAG01 Folding Type OEL Display Module Pixel Number: 96 x 64, Monochrome, COG Package						DMX9664SDGF34	B	
		Material						Soda Lime / Polyimide		
		Title		Drawn	E.E.	Panel / E.	P.M.	Scale	Sheet	Size
		UG-9664HLBAG01 Folding Type OEL Display Module Pixel Number: 96 x 64, Monochrome, COG Package		Humphrey Lin	James Wang	Ivy Lo	Sean Lin	1:1	1 of 1	A3
		Tolerance		Date						
		Dimension ±0.3		20071225	20071225	20071225	20071225			
		Angle ±1								